
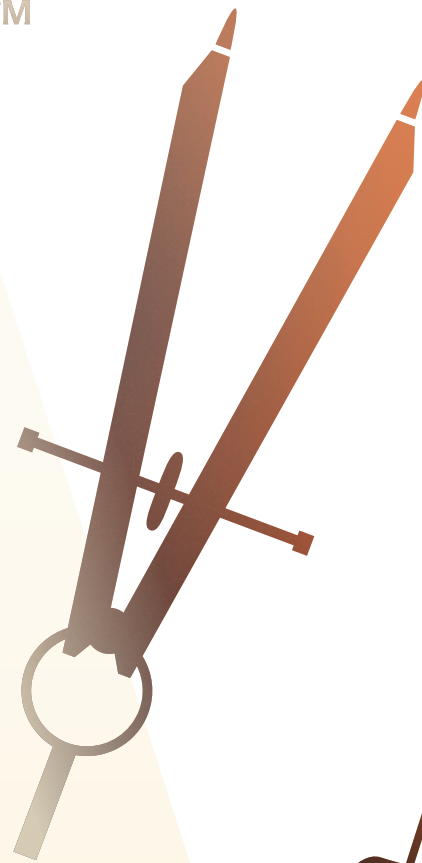
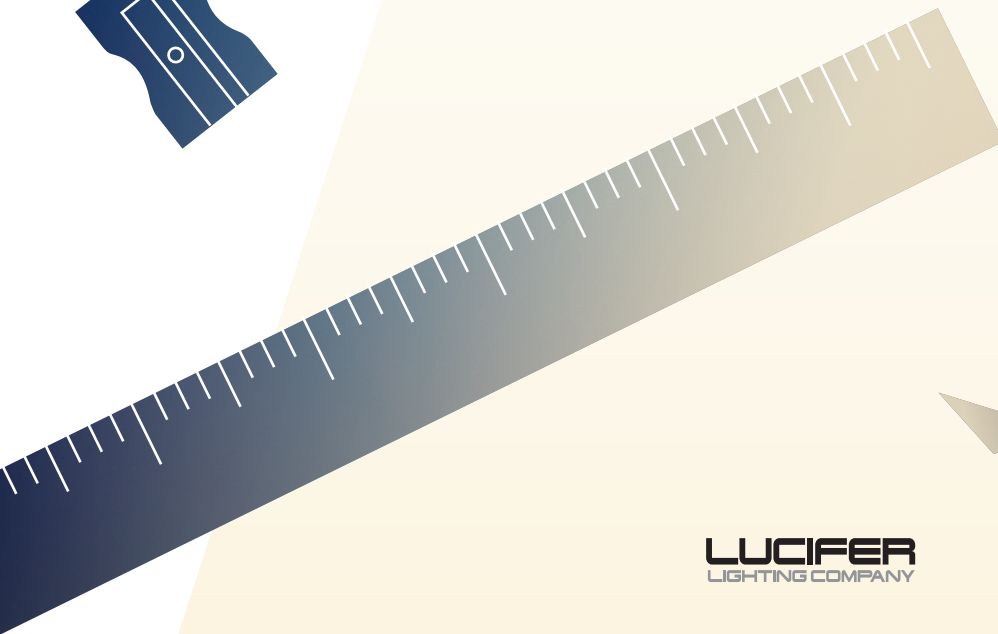


# Atomos<sup>TM</sup>

VERY GOOD THINGS. VERY SMALL PACKAGE.

/ at - OH - mōs /



**LUCIFER**  
LIGHTING COMPANY



We keep making our light more beautiful and fixtures more compact. It's what you've come to expect from Lucifer Lighting.






# We've put everything we know about thermals, optics and ease of installation into Atomos, our smallest fixture, yet.


## TINY APERTURES, BIG LIGHT

Available in 2" small aperture and 1" pinhole in both round and square. Five standard finishes and custom finishes available.


1" Pinhole Square

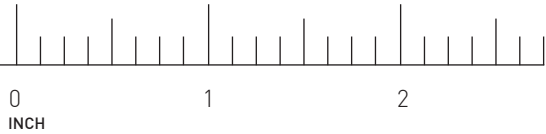


1" Pinhole Round



2" Small Aperture Square

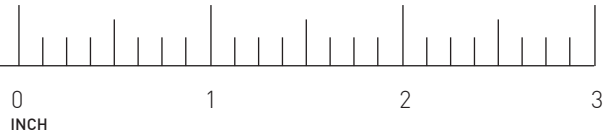

2" Small Aperture Round




## FIXTURE FINISHES



## SPRING-LOADED RETENTION ROLLERS

Innovative design uses constant force mechanics to keep fixture snug against the ceiling plane. For ceiling thicknesses of 1/2" to 2".

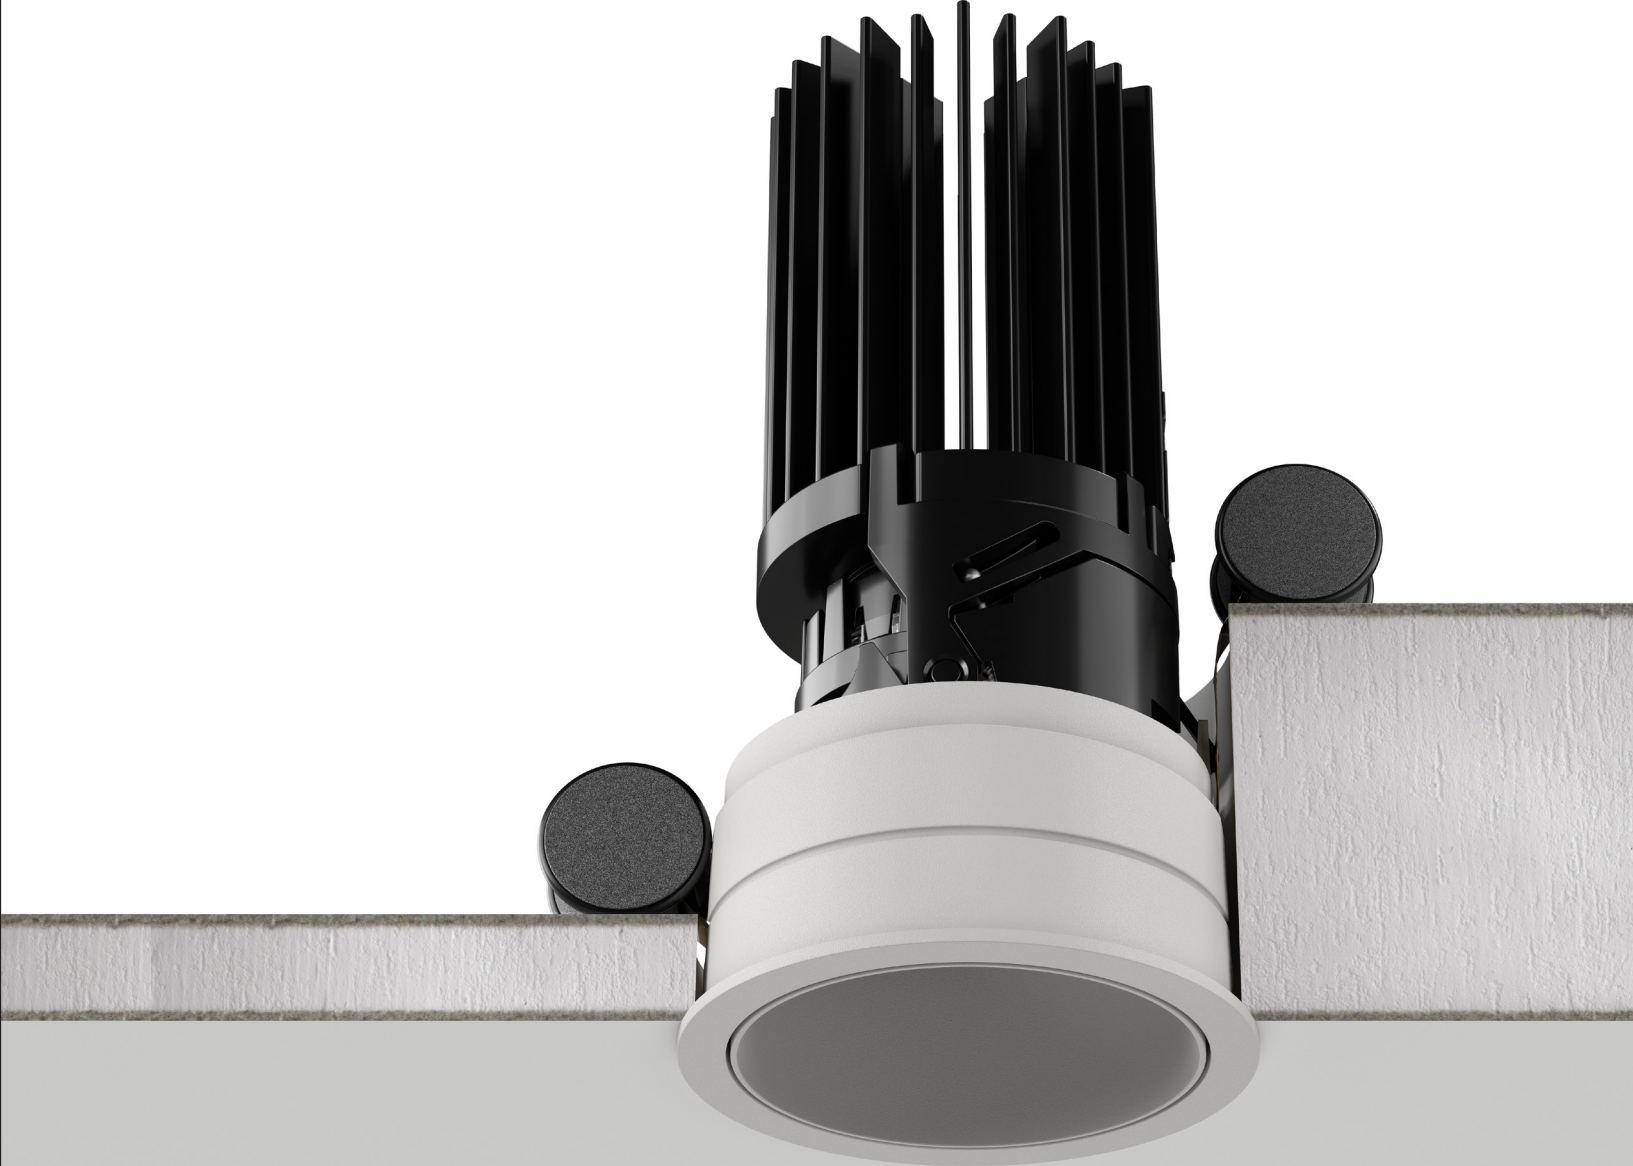



An integrated driver ensures installation ease without sacrificing closet or attic space to store power supplies typically common to other manufacturers.





**FLANGE OPTIONS**

Trimless or overlay flange options for a minimal, modern aesthetic.


**2" FLANGE**

Shown with Round Trim and Round Baffle




**2" TRIMLESS**

Shown with Round Applique and Round Baffle

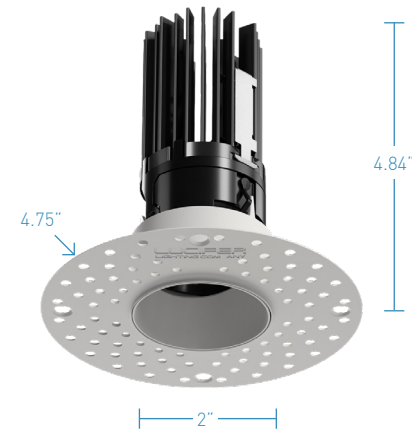


**1" ZERO-SIGHTLINE**

Shown with Square Applique and Square Baffle

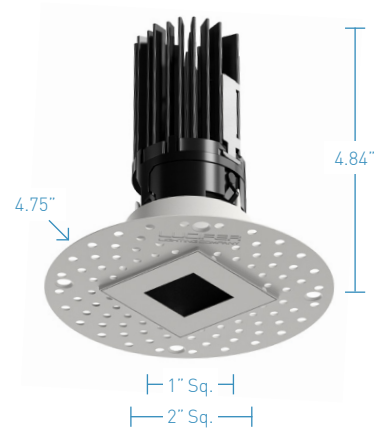

**1" ZERO-SIGHTLINE**

Shown with Pinhole Applique and Pinhole Baffle

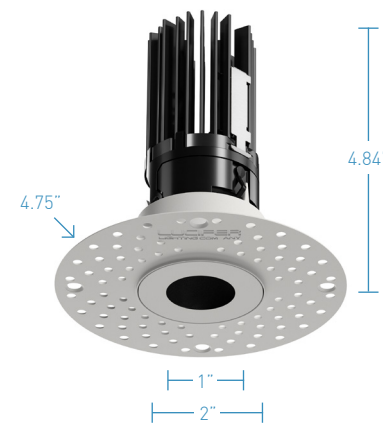

**TRIMLESS MILLWORK**

Available for both 2" Round and Square.



**ZERO-SIGHTLINE MILLWORK**

Available for 1" Round.







Available with a comfortable and smooth warm-dim color profile to make spaces feel inviting and intimate.



# Our special Zoom Optic makes it easy to adjust beam spreads to highlight what's most important.




### ENHANCED ACCESSORY

Fixture as standard is specifiable with one of five dedicated beam spreads. Zoom Optic is a special adjustable accessory ordered in place of fixed distribution optics to adjust beam spread on site.

### CLICK-TO-SET BEAM SPREADS

Proprietary, patent-pending technology provides in the field flexibility – just turn the optic and click into any of five, fixed beam spreads.

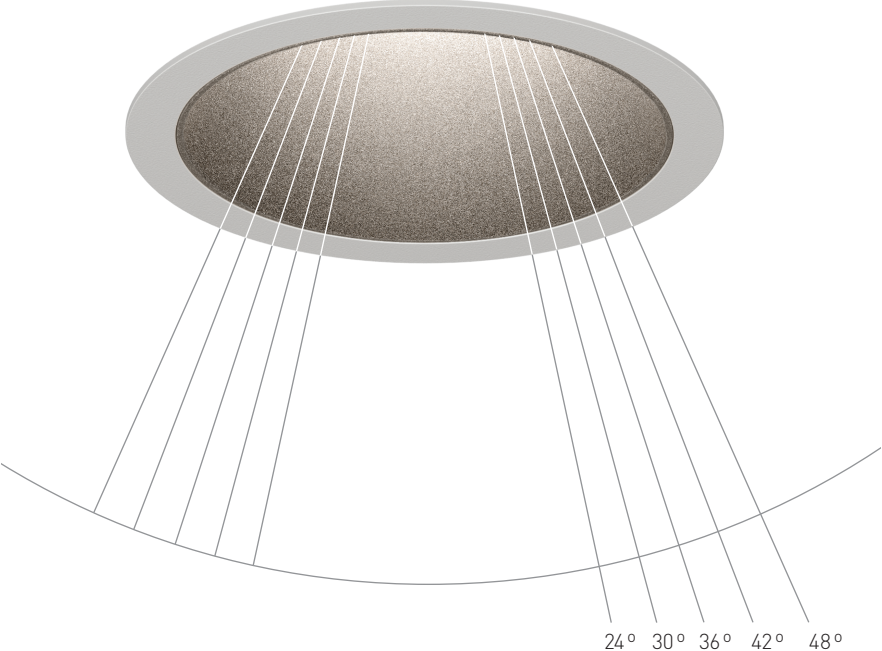

### 2" ROUND WALLWASH





30" SETBACK / 30" ON CENTER SPACING

- Average fc: 11.48
- Min / max: 5.81
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 25ft wall shown



36" SETBACK / 36" ON CENTER SPACING (RECOMMENDED)

- Average fc: 9.26
- Min / max: 5.30
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 30ft wall shown

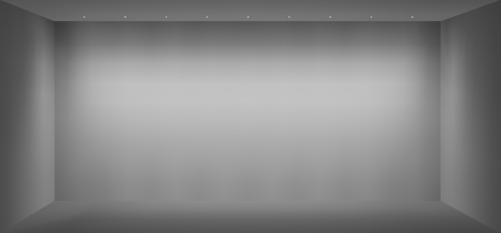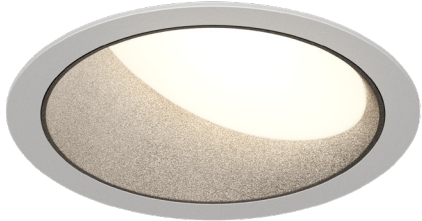

42" SETBACK / 42" ON CENTER SPACING

- Average fc: 7.22
- Min / max: 7.60
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 35ft wall shown

### 2" SQUARE WALLWASH




30" SETBACK / 30" ON CENTER SPACING

- Average fc: 12.64
- Min / max: 4.83
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 25ft wall shown



36" SETBACK / 36" ON CENTER SPACING (RECOMMENDED)

- Average fc: 11.30
- Min / max: 4.46
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 30ft wall shown

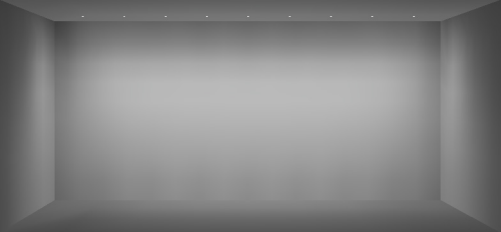

42" SETBACK / 42" ON CENTER SPACING

- Average fc: 8.07
- Min / max: 5.76
- 10ft ceiling shown / 8-12ft ideal
- 9 fixtures / 35ft wall shown




Whether for new construction or remodel projects anywhere in the world, these tiny apertures provide discrete aesthetics with impressive performance.






# Bright but dimmable – our LEDs bring consistent cool or warm inviting light to life.

## COLOR TEMPERATURES

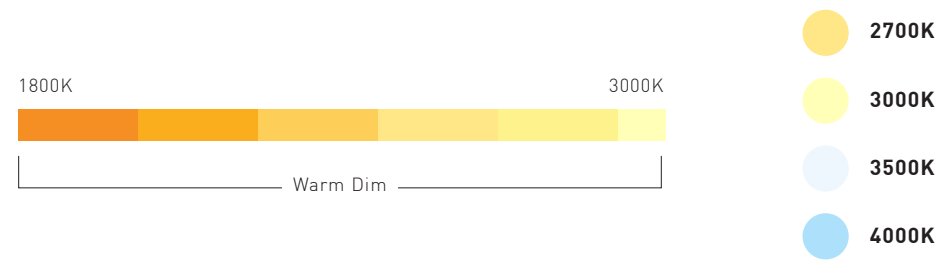

## PHOTOMETRY

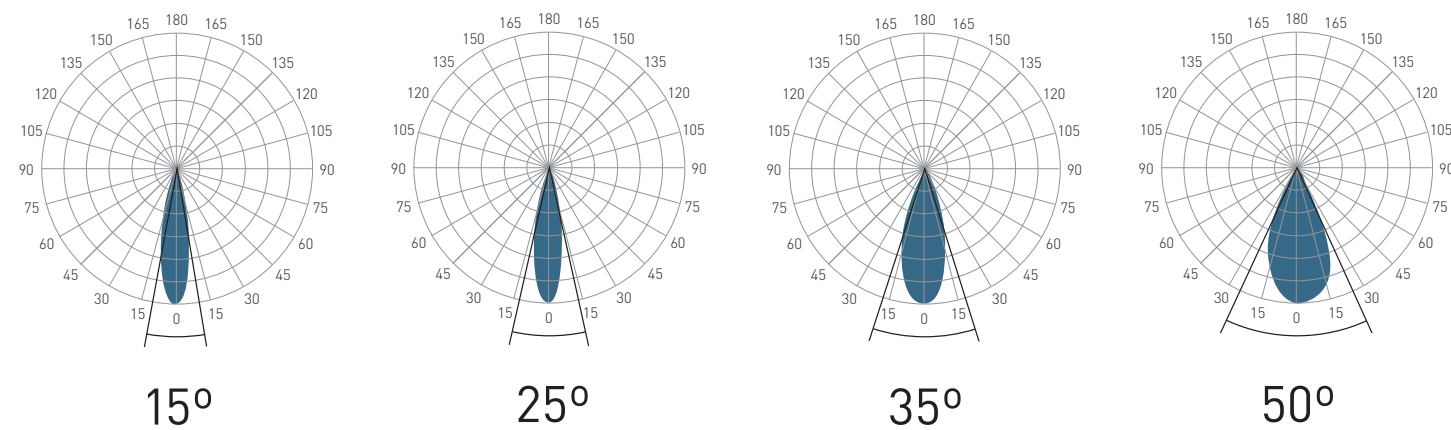


## WARM DIM

### WARM DIM PROFILE

9009D 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2900	2850	2550	2000	1900	1800
Light Output (Lm)	587	470	411	294	117	59	12
Power (W)	12	9.6	8.4	6.0	2.4	1.2	0.2
Efficacy (LPW)	49	49	49	49	49	49	49

### WARM DIM PERFORMANCE SOFT FOCUS FILM

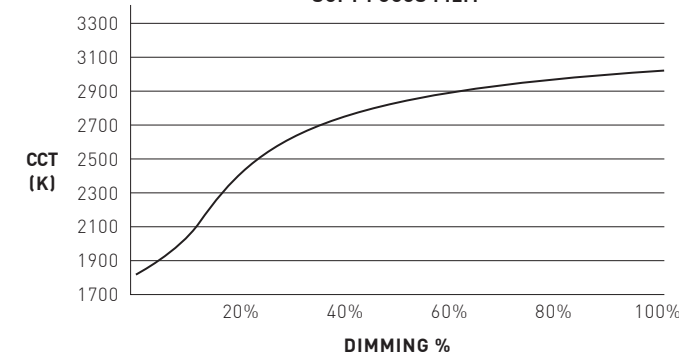

## ORDERING SHEET




Trim	Trim Type	Fixture Type	Rating	Trim Finish	Baffle Finish	Lumen Package	CCT	Optic	Install Type	Driver	Effects Device
A2RS 2" Round Standard	F Flange Overlay	AD Adjustable* *[0° - 30° tilt]	1 Dry/Damp (IP20)	WH White	WH White	STATIC WHITE	27 2700K	15 15°	0.5" - 2.0" MAX CEILING THICKNESS	INTEGRAL/REMOTE PH ELV/Triac, 1%, 120V	STANDARD 4 Soft Focus Film
				AG Satin Silver	AG Satin Silver		30 3000K	25 25°			
A2SS 2" Square Standard	T Trimless Drywall	W Trimless Wood* *Not available for remodel installations	2 Wet (IP44)	AU Cashmere Gold	AU Cashmere Gold	8012D 80+CRI, Delivered Lumens - 912	35 3500K	35 35°	INTEGRAL DRIVER I IC	SG 0-10V Analog, LOG 1%, 120 or 277V	ALTERNATIVE 0 No Media* *[Not available for Wet Location, Warm Dim, or Airtight Housings]
				BB Burnt Bronze	BB Burnt Bronze		40 4000K	50 50°			
				BK Black	BK Black	9010D 90+CRI, Delivered Lumens - 773		AZ Adjustable Zoom* *[24°, 30°, 36°, 42°, and 48° beam spreads]	C IC, Airtight* *[Chicago Plenum, Airtight & Title 24 compliant housing]	LP Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black, 120 or 277V	2 Honeycomb Louver* *[Not available for Wet Location, Warm Dim, or Airtight Housings]
				PR Primer	PR Primer						
				OO Trimless* *[Required for trimless]	CF Custom Finish* *[Consult factory]				REMOTE DRIVER S IC, Remote	L2 Lutron, Hi-Lume 1% 2-Wire, 120V	3 Clear Film* *[Not available for Warm Dim]
				CF Custom Finish* *[Consult factory]		WARM DIM	9009D 90+CRI, Delivered Lumens - 663	WD 3000K-1800K	D IC, Airtight Remote* *[Chicago Plenum, Airtight & Title 24 compliant housing]	LH Lutron, Hi-Lume Ecosystem 1% Fade to Black, 120V or 277V	5 Asymmetric Film
									REMODEL R Remodel	E6 eldoLED, SOLdrive 0.1% 0-10V, LOG, 120 - 277V	S Honeycomb Louver w/ Soft Focus Film
									M Remodel Remote	EN eldoLED, SOLdrive 0.1% 0-10V, LIN, 120 - 277V	C Honeycomb Louver w/ Clear Film* *[Not available for Warm Dim]
										ED eldoLED, SOLdrive 0.1% DALI, LOG, 120 - 277V	

\* All delivered lumen outputs and T24 compliance reflect 3000K paired with 25° optic and soft focus film.

[WH] White Powder Coat	[AG] Satin Silver Powder Coat	[AU] Cashmere Gold Powder Coat	[BB] Burnt Bronze Powder Coat	[BK] Black Powder Coat
------------------------	-------------------------------	--------------------------------	-------------------------------	------------------------

**PART NUMBER NOTES**  
 Trim ships as e.g., A2RSFAD1AGAG-8012D27-151-PH\*  
 Housing ships as e.g., IFS-A21-280A-PH\*  
 Remote driver ships as e.g., PSA2-RMT-280A-PH\*



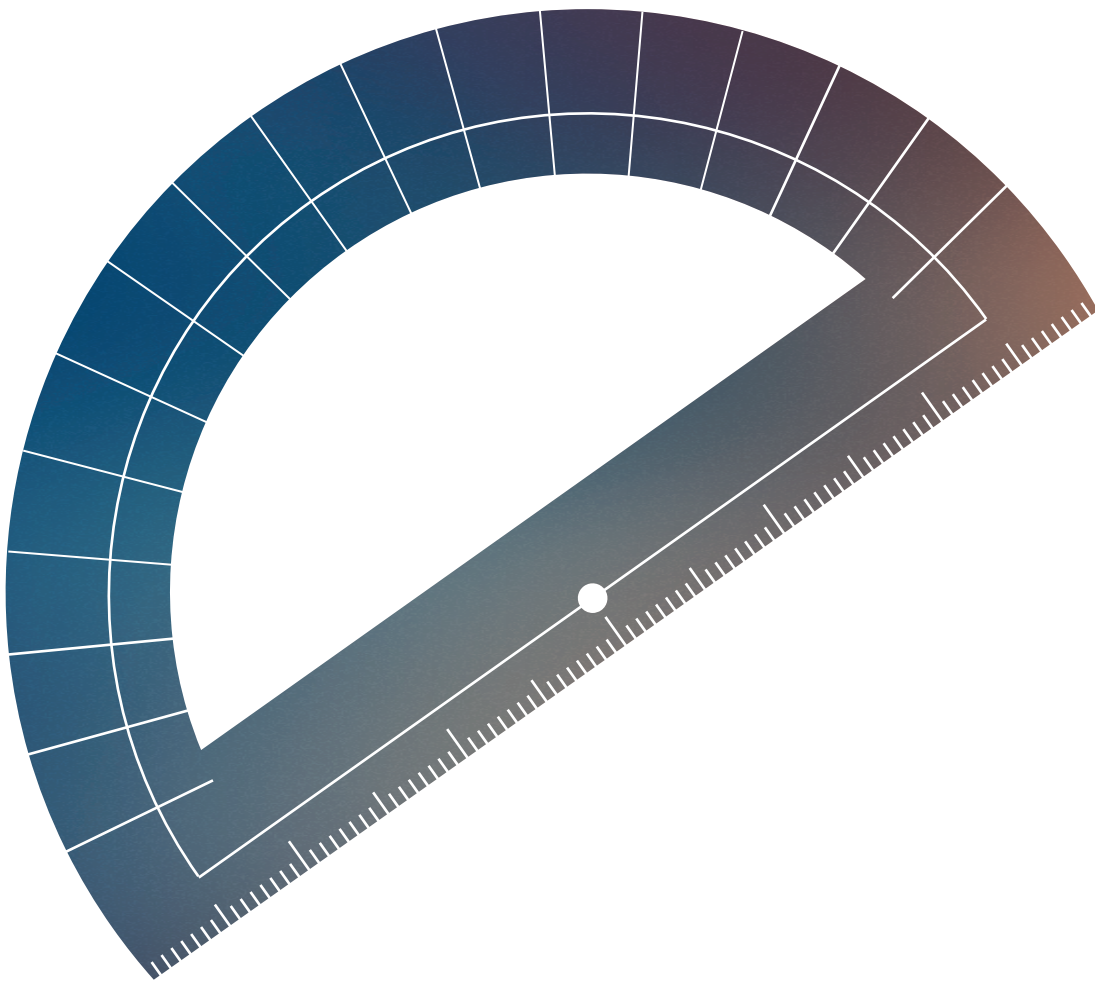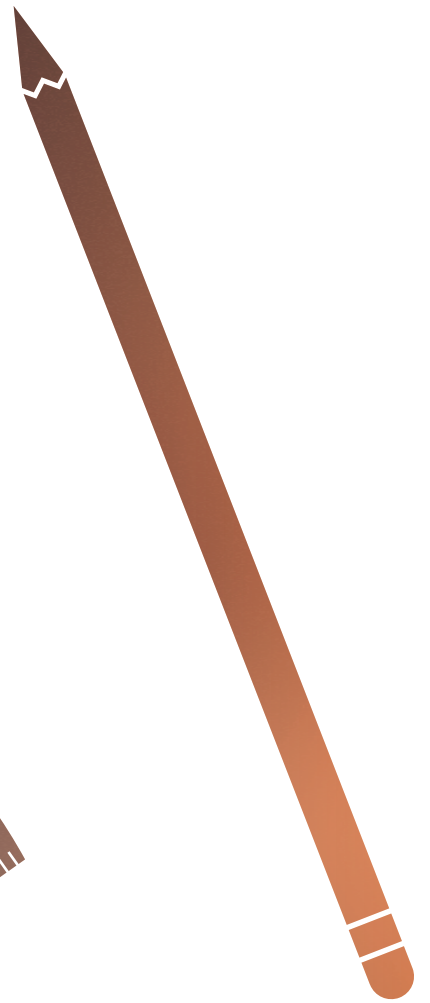

**LUCIFER**  
LIGHTING COMPANY

[luciferlighting.com](http://luciferlighting.com)

©2021 Lucifer Lighting Company. All rights reserved.