

APPLIQUÉ

(DLA-APP-Z) ZERO SIGHTLINE APPLIQUÉ KIT

INSTALLATION

Before beginning any APPLIQUÉ installation, disconnect electrical power at a main switch or circuit breaker.

IMPORTANT SAFETY INSTRUCTIONS

1. Read Installation Instructions completely.
2. Disconnect electrical power at main switch or circuit breaker.
3. Disconnect housing power.
4. Ensure a qualified electrician will perform all electrical procedures.
5. Contact Lucifer Lighting Company with any questions or concerns.
6. Failure to follow these instructions may result in an improper installation and void the manufacturer's warranty.

DESCRIPTION

The Zero Sightline Appliqué Kit provides an adapter to allow a "flush" installation of Lucifer Lighting Company Downlight Trims.

The instructions provided in this guide can have a large effect on the end result of the appliqué installation.

To ensure proper results, follow the outlined procedures for installation of the following appliqués:

- ◆ DLA-APP-Z-RD
- ◆ DLA-APP-Z-SQ

SAVE THESE INSTRUCTIONS.

APPLIQUÉ PARTS IDENTIFICATION

QTY	DESCRIPTION	PART ID
4	#6-32 Flat Head Nylon Screw	A
1	Plaster Plug	B
1	Appliqué	C

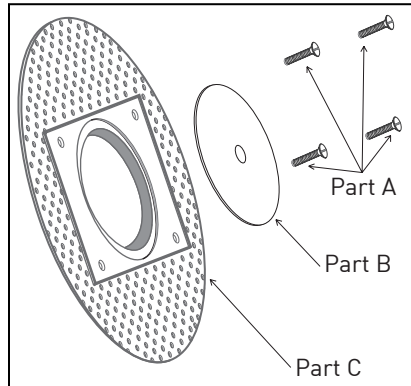



Figure 1. DLA-APP-Z-RD (DLA-APP-Z-SQ equipped with same parts and quantity. Appliqué and plaster plug shape differ.)

NOTICE

Lucifer Lighting Company downlight housings are shipped from the factory ready to accept the Zero Sightline Appliqué Kit.

Upon installation, the trim receptacle faceplate on the housing MUST protrude into the hole in the drywall.


LUCIFER
LIGHTING COMPANY

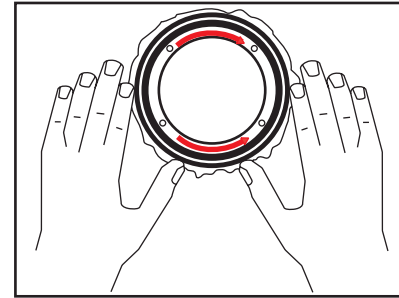

STEP 1


The housing collar can be rotated to achieve a desired position.

Rotate the housing collar left to right to ensure it is free from debris.

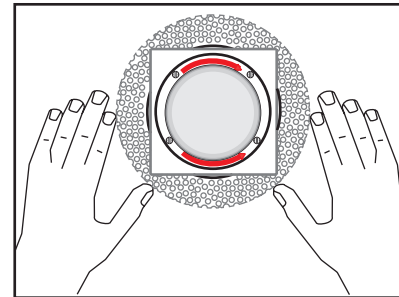

STEP 2

Align the countersunk screw holes in the appliqué to the screw holes surrounding the collar opening.

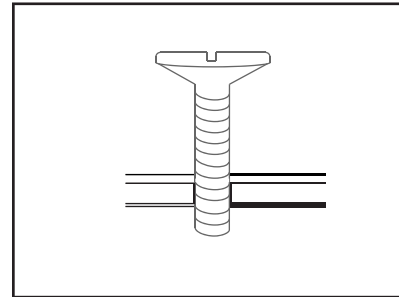


STEP 3

Begin threading the screws through the appliqué and collar.

**ONLY USE SCREWS PROVIDED
MUST USE ALL 4 SCREWS**

Do not tighten screws completely.

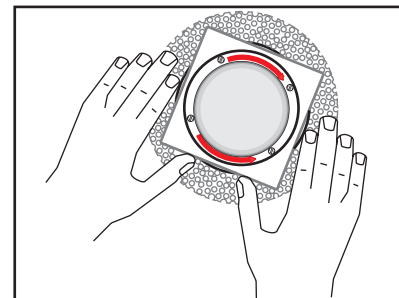

STEP 4

Rotate the appliqué so that one of the appliqué edges is aligned with the desired universal references line or plane (wall, etc.).

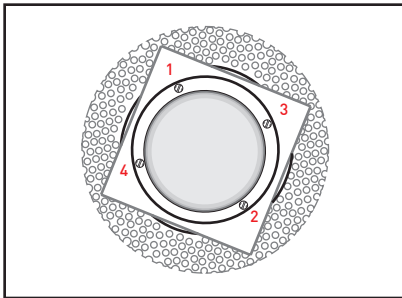


FIGURE 5A

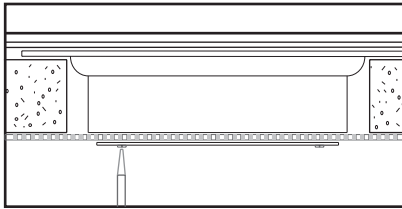


FIGURE 5B

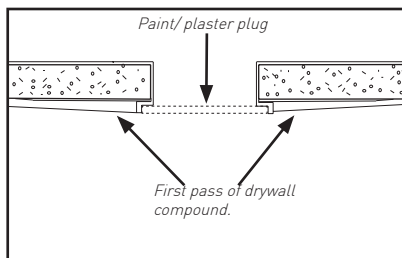
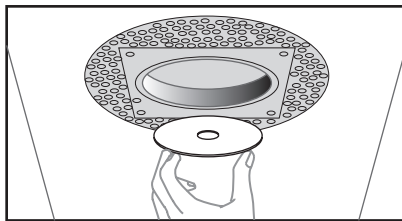


Figure not to scale

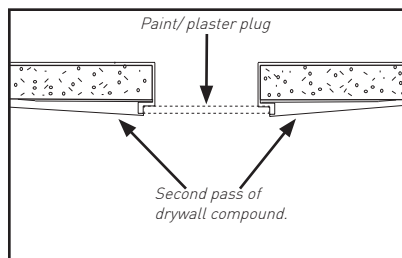


Figure not to scale

STEP 5

Hold the appliqué in the desired position.

Tighten the screws in sequence beginning with screw number 1 to avoid warping the appliqué. (See Figure 5A & 5B)

INSTALL PLASTER PLUG IF NOT ALREADY INSTALLED

Do not remove the plug until all plaster and paint work is complete.

STEP 6

Use a floating knife to apply the first pass of drywall compound and float the area up to slightly below the edge of the flange/ plaster stop.

Float out as far as necessary to hide the perforated appliqué and allow the first pass of joint compound to dry.

STEP 7

After the first pass is dry, apply a second coat of drywall compound.

Make the surface as smooth as possible.

Ensure the coat of compound falls below the flange/ plaster stop.

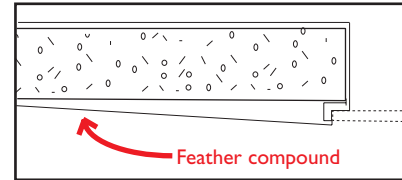


Figure not to scale

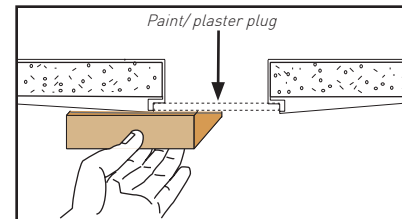


Figure not to scale


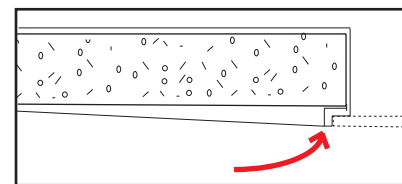


Figure not to scale

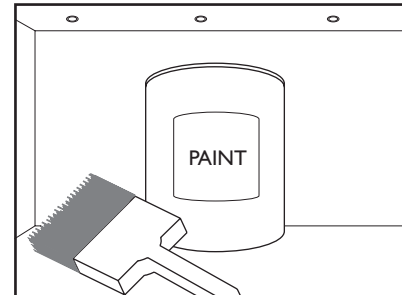

STEP 8

On this pass, feather the compound as you move away from the flange to give the appearance of a perfectly flat ceiling.

STEP 9

Allow the drywall compound to dry fully and cure.

Gently use a block sanding screen and sand surface until the drwall compound is even with bottom of flange/ plaster stop. Ensure the surface is smooth.

STEP 10

Once the drywall compound is fully cured the ceiling may be painted.

After the paint is dry, remove the plaster plug making sure the adhesive tape is removed as well. Check for any drywall compound or paint that may have seeped beneath the plug and carefully scrape if necessary.

Any foreign material left in or on the recessed appliqué surface may prevent proper zero-sightline fixture installation.

Install the downlight fixture.

LUCIFER
LIGHTING COMPANY

3750 IH 35 North
San Antonio, Texas 78219 USA
[PH] +1 210 227 7329
[FAX] +1 210 227 4967
www.luciferlighting.com

©2010 Lucifer Lighting Company
As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.