


# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

Elegant design means this monopoint does more. An inventive elbow built into the fixture body that allows a full 90 degree tilt and drop lengths of up to 1' extend adjustability.

PROJECT NAME:	TYPE:
---------------	-------

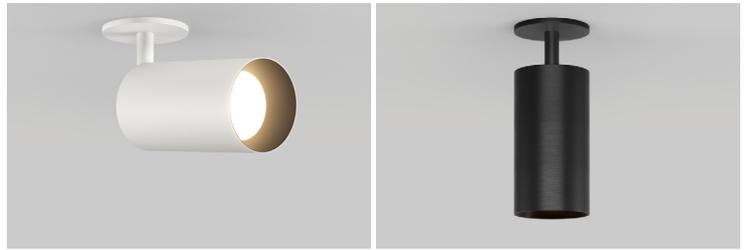

## ORDERING INFORMATION - MONOPOINT

CYLINDER	LENGTH	FIXTURE	BODY FINISH	BAFFLE FINISH	STEM FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	DRIVER	MEDIA	MOUNTING
<b>CM1</b>											<b>E</b>
CM1 66mm	LENGTHS SL 1.4" Standard 06 6" 12 12"  CUSTOM LENGTHS XX Specify in 1" increments between 2"-11" [Ex. 4" = 04]* *(Increased lead time)  STEMS ARE NOT FIELD CUTTABLE	ADJUSTABLE DRY / DAMP	POWDERCOAT	POWDERCOAT	POWDERCOAT	<b>STATIC WHITE</b> <b>80S11A</b> 80+ CRI, 11 Watts Lumens Delivered - 1095 <b>90S11A</b> 90+ CRI, 11 Watts Lumens Delivered - 941 <b>97S11A</b> 97+ CRI, 11 Watts Lumens Delivered - 826  <b>REMOTE STATIC WHITE</b> <b>80S17A</b> 80+ CRI, 17 Watts Lumens Delivered - 1655 <b>90S17A</b> 90+ CRI, 17 Watts Lumens Delivered - 1422 <b>97S17A</b> 97+ CRI, 17 Watts Lumens Delivered - 1249  <b>WARM DIM</b> <b>90W11A</b> 90+ CRI, 11 Watts Incandescent Profile Lumens Delivered - 654 Halogen Profile Lumens Delivered - 658  <b>REMOTE WARM DIM</b> <b>90W18A</b> 90+ CRI, 18 Watts Incandescent Profile Lumens Delivered - 1017 Halogen Profile Lumens Delivered - 1017  SEE PAGE 3 FOR WARM DIM PROFILE COMPARISON.	<b>24</b> 2400K* *(90+ CRI only) <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K  <b>24</b> 2400K* *(90+ CRI only) <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K  <b>WL</b> 2600K - 1800K <b>WD</b> 2900K - 1800K  <b>WL</b> 2700K - 1800K <b>WD</b> 3000K - 1800K	<b>10</b> 10° (>19) <b>15</b> 15° (<16) <b>20</b> 20° (<10) <b>25</b> 25° (<10) <b>40</b> 40° (<10) <b>60</b> 60° (>19)  <b>20</b> 20° (<10) <b>25</b> 25° (<10) <b>40</b> 40° (<10) <b>60</b> 60° (>13)  <b>20</b> 20° (<10) <b>25</b> 25° (<10) <b>40</b> 40° (<10) <b>60</b> 60° (>13)	<b>IE</b> Electronic ELV / TRIAC 220V-240V  <b>REMOTE</b> <b>IG</b> eldoLED, SOLOdrive 0.1% 0-10V, LOG 120V-277V  <b>IN</b> eldoLED, SOLOdrive 0.1% 0-10V, LIN 120V-277V  <b>ID</b> eldoLED, SOLOdrive 0.1% DALI, LOG 120V-277V	<b>STANDARD MEDIA</b> <b>4</b> Soft Focus Lens  <b>0</b> No Lens* *(Standard with 10° optic, Not available for IP65 Wet Location or Warm Dim)  <b>ALTERNATE MEDIA</b> <b>2</b> Honeycomb Louver* *(Not available for IP65 Wet Location or Warm Dim) <b>3</b> Clear Glass Lens* *(Not available for Warm Dim) <b>5</b> Frosted Glass Lens <b>6</b> Frosted Soft Focus Lens <b>7</b> Frosted Linear Spread Lens <b>S</b> Soft Focus Lens w/ Honeycomb Louver <b>F</b> Frosted Glass Lens w/ Honeycomb Louver	<b>E</b> EXMP Export Mounting Plate. Features 66mm diameter canopy
		F02 Fixed 0° No Tilt*	WH White	WH White	WH White						
		F12 Fixed 15° Tilt*	BK Black	BK Black	BK Black						
		F32 Fixed 30° Tilt*	AB Architectural Bronze	AB Architectural Bronze	AB Architectural Bronze						
		F42 Fixed 45° Tilt*	AG Satin Silver	AG Satin Silver	AG Satin Silver						
			AU Cashmere Gold	AU Cashmere Gold	AU Cashmere Gold						
			BB Burnt Bronze	BB Burnt Bronze	BB Burnt Bronze						
			CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)						
			ALUMINA INTERIOR APPLICATIONS ONLY	ALUMINA CONSULT FACTORY FOR ALUMINA FINISHES	ALUMINA CONSULT FACTORY FOR ALUMINA FINISHES						
			<b>01</b> Brushed Obsidian <b>02</b> Matte Obsidian <b>03</b> Brushed Dark Patinated Bronze <b>04</b> Matte Dark Patinated Bronze <b>05</b> Brushed Aged Aluminum <b>06</b> Matte Aged Aluminum <b>07</b> Brushed Cast Brass <b>08</b> Matte Cast Brass <b>09</b> Brushed Light Patinated Bronze <b>10</b> Matte Light Patinated Bronze  ALUMINA NOT RECOMMENDED FOR EXTERIOR APPLICATIONS, FINISHES ARE NOT UV RATED								

### PART NUMBER NOTES

- CM1 ships as e.g., CM124HS1WHBK90S11\*3040IE\*4E
- Remote driver ships as e.g., PS-RMT-90S-17A-2IG\*

LUMENS DELIVERED REFLECT 3000K PAIRED WITH 25° OPTIC AND SOFT FOCUS LENS.

SEE PAGE 3 FOR UGR RATINGS

# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

## FINISHES

### POWDERCOAT FINISHES



### ALUMINA FINISHES BY LUCIFER LIGHTING™



## ACCESSORIES

### REPLACEMENT MEDIA

**HCL-CT1** Honeycomb Louver\*  
\*(Not available for Warm Dim)

**CGL-CT1** Clear Glass Lens\*  
\*(Not available for Warm Dim)

**SFL-CT1** Soft Focus Lens

**FGL-CT1** Frosted Glass Lens

**FSFL-CT1** Frosted Soft Focus Lens

**FLSL-CT1** Frosted Linear Spread Lens

### REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

#### Static White

- RO-50-15-S** 15° optic
- RO-50-20-S** 20° optic
- RO-50-25-S** 25° optic
- RO-50-40-S** 40° optic
- RO-50-60-S** 60° optic

#### Warm Dim

- RO-50-20-W** 20° optic
- RO-50-25-W** 25° optic
- RO-50-40-W** 40° optic
- RO-50-60-W** 60° optic

# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

## PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC		15° OPTIC		20° OPTIC		25° OPTIC		40° OPTIC		60° OPTIC	
		NO SOFT FOCUS LENS		SOFT FOCUS LENS									
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	631	57	991	90	1093	99	1095	100	1019	93	1145	104
80S17A	17	861	51	1435	84	1701	100	1655	97	1513	89	1640	96
90S11A	11	544	51	851	86	939	95	941	96	875	89	984	100
90S17A	17	740	41	1233	76	1461	90	1422	87	1300	80	1409	86
97S11A	11	469	43	747	68	824	75	826	75	768	70	864	79
97S17A	17	639	38	1083	64	1283	75	1249	73	1141	67	1237	73
90W11AL (2600K-1800K)	11	-	-	-	-	667	60	654	59	605	54	635	58
90W11AD (2900K-1800K)	11	-	-	-	-	661	60	658	59	600	54	640	58
90W18AL (2700K-1800K)	18	-	-	-	-	1019	56	1017	56	927	57	997	62
90W18AD (3000K-1800K)	18	-	-	-	-	1043	57	1017	56	943	58	991	61

### UNIFIED GLARE RATING

10° OPTIC NO LENS	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
>19	<16	<10	<10	<10	<16

### MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
No Lens	1.05
CGL	0.97
SFL	1.00
FGL	0.85
FSFL	0.82
FLSL	0.78
HCL	0.75
SFL W/ HCL	0.68
FGL W/ HCL	0.47

### OUTPUT MULTIPLIER


CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.000
3500K	1.03
4000K	1.08

## WARM DIM PERFORMANCE - SOFT FOCUS LENS - 25° OPTIC

### INCANDESCENT DIMMING PROFILE

	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
90W11AL 2600K - 1800K							
CCT (K)	2600	2550	2520	2450	2200	1925	1800
Light Output (Lm)	654	523	457	327	130	65	13
Power (W)	11	8.8	7.7	5.5	2.2	1.1	.22
Efficacy (LPW)	59	59	59	59	59	59	59
90W18AL 2700K - 1800K							
CCT (K)	2600	2650	2620	2520	2180	1950	1800
Light Output (Lm)	1017	813	711	508	203	101	203
Power (W)	18	14.4	12.6	9	3.6	1.8	.36
Efficacy (LPW)	56	56	56	56	56	56	56


### 11W / 18W

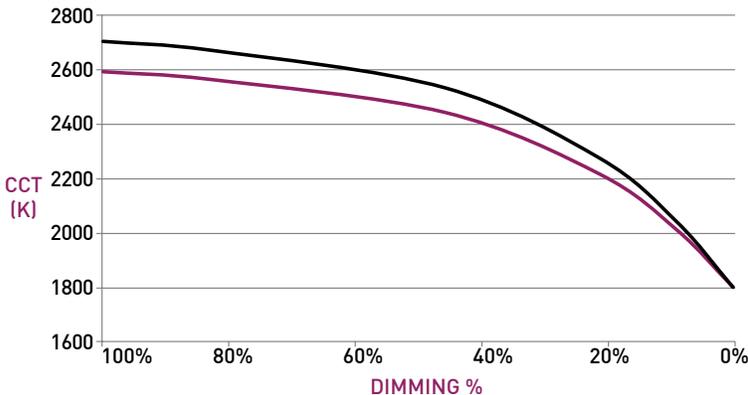

### HALOGEN WARM DIM PROFILE

	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
90W11AD 2900K - 1800K							
CCT (K)	2900	2850	2800	2720	2350	1975	1800
Light Output (Lm)	658	526	460	329	131	65	13
Power (W)	11	8.8	7.7	5.5	2.2	1.1	.22
Efficacy (LPW)	59	59	59	59	59	59	59
90W18AD 3000K - 1800K							
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	1017	813	711	508	203	101	203
Power (W)	18	14.4	12.6	9	3.6	1.8	.36
Efficacy (LPW)	56	56	56	56	56	56	56

### 11W / 18W

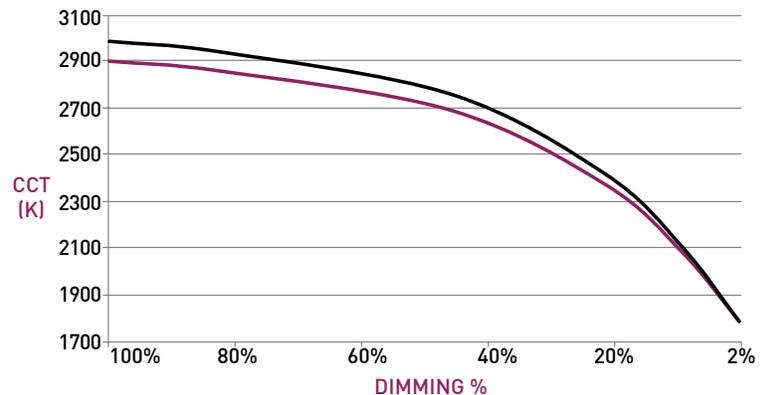


# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

## MONOPOINT


- A EXPORT MOUNTING PLATE**  
Export mounting plate (concealed) to be installed above ceiling substrate. Features minimalist 66mm diameter canopy
  - B STEM**  
Standard length is 1.4", available in even-inch increments between 2"-12". Stem is not field cuttable. Powdercoat finishes standard, consult factory for Alumina finishes.
  - C BODY**  
Available in powdercoat and Alumina finishes. Power supply integrated into fixture body.
  - D OPTICS**  
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
  - E MEDIA**  
Accepts 2 media; Soft Focus Lens standard. Wet location media sealed in place.
  - F BAFFLE**  
Baffle minimizes aperture glare and conceals view into fixture. Powdercoat finishes standard, consult factory for Alumina finishes.
  - G CANOPY**  
Adjustable Dry/Damp fixture features 0.175" and Fixed Wet fixture features 0.3" tall canopy.
  - H ADJUSTABLE FIXTURE**  
Features 90° tilt and 365° rotation. Only available for Dry / Damp locations.
  - I FIXED FIXTURE**  
Available with pre-set tilts of 0°, 15°, 30°, or 45°, and features 365° rotation. IP65 Wet rated, may be used in Dry / Damp locations.
- IMPORTANT: FIXED FIXTURE TILT CANNOT BE ADJUSTED OR CHANGED IN THE FIELD, FIXTURES MUST BE RETURNED TO FACTORY FOR TILT CHANGES AT ADDITIONAL COST.**

## DIMENSIONS / DRAWINGS

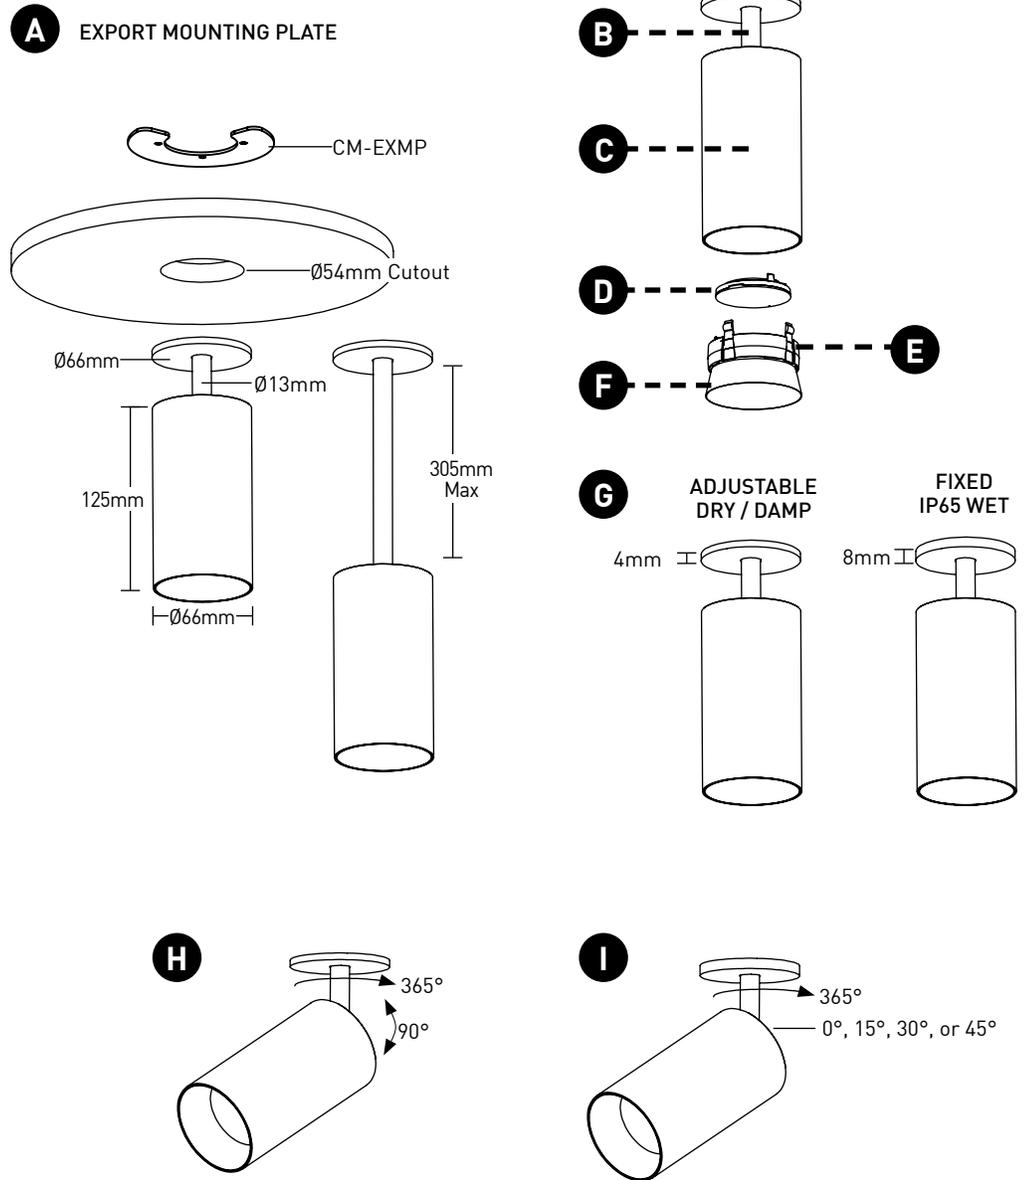

## REMOTE POWER SUPPLY

- J** Remote power supply provides additional driver options. See page 5 for maximum allowable wiring distance. Must be installed in an accessible location.

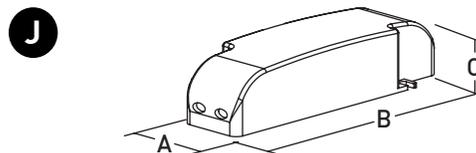

POWER SUPPLY DIMENSIONS			
Model	A	B	C
IG	41mm	210mm	34mm
IN			
ID			

# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

## TECHNICAL

### CONSTRUCTION

**Monopoint:** Machined aluminum body; painted finishes are granulated powder coat; Alumina finishes are anodized aluminum.

### STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperature of 2400K. Average rated lamp life of 50,000 hours.

### WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours.

### POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

Power Supply	PHASE		0-10V		DALI	
	IE	IG	IN	ID		
Minimum °C	-20 °C	-20 °C	-20 °C	-20 °C		
Maximum °C	40 °C	40 °C	40 °C	40 °C		
Dimming %	2.0%	0.1%	0.1%	0.1%		

Note: For IG and IN drivers consult chart on page 6 to confirm appropriate dimming curve for compatibility with selected control.

### MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
IG, IN, ID	-	-	118'	72	46'

### LISTING

Monopoints and drivers CE Listed for Dry / Damp and IP65 Wet locations. Integral drivers ENEC and CB Listed.

### DECLARE

LBC Red List Approved.

### LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. Warranty period begins from the date of shipment by Seller. [Consult website for full warranty terms and conditions.](#)

### CHANGE LOG

- 04/27/2023: ADDED AU AND BB FINISHES OPTIONS FOR BODY AND STEM.
- 08/07/2023: ADDED NEW LED AND OPTIC OFFERINGS. REMOVED 2400K OFFERING.
- 01/17/2024: ADDED IP65 WET RATED FIXED FIXTURE, 2400K, AND INTEGRAL WARM DIM OFFERINGS.

# MONOPOINT INTERNATIONAL CM1 SURFACE MOUNT

## DIMMING COMPATABILITY

### eldoLED DRIVER COMPATIBILITY

Power supply <b>IG</b> Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply <b>IN</b> Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DDTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1