


FRAXION® SLOPED

FIXED DOWNLIGHT

One of our most versatile and flexible fixtures is now available for sloped ceilings, allowing designers to use a single style of fixture across a wider array of spaces.

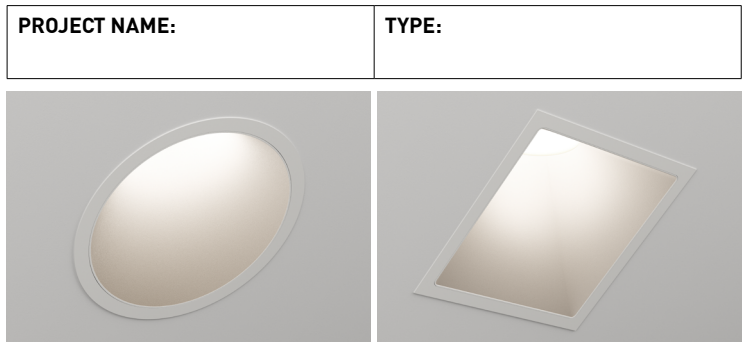

ORDERING INFORMATION - DOWNLIGHT / HOUSING



JA8-2022 INDICATED BY SHADING

SLOPE RANGE	SHAPE	TRIM	RATING	FLANGE FINISH	BAFFLE FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	INSTALL TYPE	CEILING THICKNESS	DRIVER	MEDIA				
FS1 15° - 30° (3/12 - 7/12) Slope 1	R Round	M Microflange	1 Dry/Damp	WH White	WH White	STATIC WHITE 80S11A 80+ CRI, 11 Watts Delivered Lumens - 1041 80S15A 80+ CRI, 15 Watts Delivered Lumens - 1413 80S21A 80+ CRI, 21 Watts Delivered Lumens - 1918 90S11A 90+ CRI, 11 Watts Delivered Lumens - 894 90S15A 90+ CRI, 15 Watts Delivered Lumens - 1214 90S21A 90+ CRI, 21 Watts Delivered Lumens - 1648 97S11A 97+ CRI, 11 Watts Delivered Lumens - 785 97S15A 97+ CRI, 15 Watts Delivered Lumens - 1066 97S21A 97+ CRI, 21 Watts Delivered Lumens - 1447	27 2700K 30 3000K 35 3500K 40 4000K	15 15° (<19) 20 20° (<13) 25 25° (<13) 40 40° (<19) 60 60° (<19)	INTEGRAL DRIVER X IC / Non-IC C IC Airtight* *(CCEA, Airtight & Title 24 compliant housing) REMOTE DRIVER V IC / Non-IC Remote D IC Airtight, Remote* *(CCEA, Airtight & Title 24 compliant housing)	1 0.5" - 1.375" 2 1.375" - 2.0" 3 2.0" - 2.25"	PH ELV/Triac, 2%, 120V* *(Not available for 80C12A, 90C10A, and 97C10A) L2 Lutron, Hi-Lume 1% 2-Wire, 120V SG 0-10V Analog, LOG 1%, 120 or 277V* *(Specify to match Fraxion3 SG) SN 0-10V Analog, LIN 1%, 120 or 277V* *(Specify to match Fraxion3 SN) AN Philips Xitanium, LOG, 1%, 120 or 277V* *(Specify to match Fraxion4 AN4) LN Philips Xitanium, LIN, 1%, 120 or 277V* *(Specify to match Fraxion4 LN2) LP Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black, 120 or 277V EG eldoLED, SOL0drive 0.1% 0-10V, LOG, 120 - 277V EN eldoLED, SOL0drive 0.1% 0-10V, LIN, 120 - 277V ED eldoLED, SOL0drive 0.1% DALI-2, LOG, 120 - 277V TUNABLE WHITE POWER SUPPLIES DG eldoLED, DUALdrive 0.1% 0-10V, LOG 120 - 277V DN eldoLED, DUALdrive 0.1% 0-10V, LIN 120 - 277V DD eldoLED, DUALdrive 0.1% DALI-2, LOG 120 - 277Vz	STANDARD MEDIA 04 Soft Focus Lens ALTERNATE MEDIA 03 Clear Glass Lens* *(Not available for Warm Dim) 05 Frosted Glass Lens 08 Frosted Soft Focus Lens 14 Wide Distribution Lens* *(Required and only available for 85° beam spread) 26 Frosted Linear Spread Lens 28 Adjustable Honeycomb Louver and Soft Focus Lens* *(Not available with wet location, or Airtight Housings)				
	FS2 30° - 45° (7/12 - 12/12) Slope 2	S Square	T Trimless W Trimless Wood* *(Not available for Wet location)	2 Wet	AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer OO Trimless* *(Required for trimless) CF Custom Finish* *(Consult Factory)								AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* *(Consult Factory)	WARM DIM 90W15A 90+ CRI, 15 Watts* Incandescent Profile: 2700K - 1800K Delivered Lumens - 884 Standard Profile: 3000K - 1800K Delivered Lumens - 920 *SEE PAGE 3 FOR DETAILED WARM DIM PROFILE COMPARISON.	WL 2700K - 1800K WD 3000K - 1800K	20 20° (<13) 25 25° (<13) 40 40° (<13) 60 60° (<16)
													TUNABLE WHITE 90T15B 90+ CRI, 15 Watts Delivered Lumens - 1187 *ALL DELIVERED LUMEN OUTPUTS AND T24 COMPLIANCE REFLECT 3000K, 60° OPTIC, SOFT FOCUS LENS, AND 5/12 CEILING PITCH. REFERENCE PAGE 3 FOR ADDITIONAL T24 COMPLIANT CONFIGURATIONS.	TH 5000K - 2700K	15 15° (<16) 20 20° (<10) 25 25° (<10) 40 40° (<13) 60 60° (<16)	85 85° (>19) *(Requires -14 WDL media)



PART NUMBER NOTES

- Housing and trim ship as e.g., FS1RM1-WHBK-90C14A2-3X1-PH*04

FRAZION SLOPED FIXED DOWNLIGHT

ACCESSORIES

ALTERNATE MEDIA

Dry / Damp location only.

- CGL-F3R** Clear Glass Lens*
*(Not available for Warm Dim)
- FGL-F3R** Frosted Glass Lens
- SFL-F3R** Soft Focus Lens
- FSFL-F3R** Frosted Soft Focus Lens
- WDL-F3R** Wide Distribution Lens*
*(Only available for 85° beam spread)
- FLSL-F3R** Frosted Linear Spread Lens

ADJUSTABLE HCL ASSEMBLY

Dry / Damp location only.

- OLR-F3RS1-SFL-HCL** Adjustable Honeycomb Louver and Soft Focus Lens*
*(Not available for Wet location or Airtight housings)

REPLACEMENT OPTICS

Interchangeable optics accessible through fixture aperture.

- | Static White | | Warm Dim | | Tunable White | |
|--|-----------|--|-----------|--|-----------|
| <input type="checkbox"/> RO-50-15-S | 15° optic | <input type="checkbox"/> RO-50-20-W | 20° optic | <input type="checkbox"/> RO-50-15-T | 15° optic |
| <input type="checkbox"/> RO-50-20-S | 20° optic | <input type="checkbox"/> RO-50-25-W | 25° optic | <input type="checkbox"/> RO-50-20-T | 20° optic |
| <input type="checkbox"/> RO-50-25-S | 25° optic | <input type="checkbox"/> RO-50-40-W | 40° optic | <input type="checkbox"/> RO-50-25-T | 25° optic |
| <input type="checkbox"/> RO-50-40-S | 40° optic | <input type="checkbox"/> RO-50-60-W | 60° optic | <input type="checkbox"/> RO-50-40-T | 40° optic |
| <input type="checkbox"/> RO-50-60-S | 60° optic | | | <input type="checkbox"/> RO-50-60-T | 60° optic |

HANGER BAR EXTENDER KIT

Extends hanger bars from 24.0" to 46.0" maximum.

- FRX-HBE-46** Extender, Hanger Bar

FURRING CHANNEL ACCESSORY KIT

Recommended for installations in furring channel. Available for ceiling thicknesses from 0.5" - 2.25".

- DHA-FC-KIT**

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, Dimmable

FRACTION SLOPED FIXED DOWNLIGHT

PERFORMANCE - 3000K



JA8-2022 INDICATED BY SHADING

LUMEN PACKAGE	WATTAGE	15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS		85° OPTIC WIDE DISTRIBUTION LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	939	85	989	90	1077	98	1036	94	1041	95	941	86
80S15A	15	1269	85	1332	89	1369	91	1332	89	1413	94	1413	94
80S21A	21	1718	82	1793	85	1851	88	1798	86	1918	91	1702	81
90S11A	11	807	73	850	77	925	84	890	81	894	81	808	73
90S15A	15	1090	73	1144	76	1176	78	1144	76	1214	81	1077	72
90S21A	21	1476	70	1540	73	1590	76	1545	74	1648	78	1462	70
97S11A	11	709	64	746	68	812	74	781	71	785	71	709	64
97S15A	15	957	64	1004	67	1033	69	1004	67	1066	71	946	63
97S21A	21	1296	62	1352	64	1396	66	1356	65	1447	69	1284	61
90W15A (WL 27K-18K)	15	-	-	911	61	875	58	753	50	884	59	748	50
90W15A (WD 30K-18K)	15	-	-	889	59	886	59	961	64	920	61	758	51
90T15B	15	971	65	1091	73	1036	69	1014	68	1187	79	931	62

*Performance reflects 5/12 ceiling pitch and 0.5" ceiling thickness. Consult factory for additional performance information.

OUTPUT MULTIPLIER	
CCT	CCT SCALE
2700K	0.97
3000K	1.00
3500K	1.03
4000K	1.08

MEDIA LIGHT LOSS FACTOR	
MEDIA	LIGHT LOSS FACTOR
NO LENS	1.09
CGL	1.02
SFL	1.00
FGL	0.92
FSFL	0.88
FLSL	0.85
WDL	0.91
HCL	0.64

TUNABLE WHITE MULTIPLIER	
CCT	5000K-2700K
5000K	1.16
4000K	1.08
3500K	1.04
3000K	1.00
2700K	0.96


UNIFIED GLARE RATING

10° OPTIC NO LENS	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS	85° OPTIC WIDE DISTRIBUTION LENS
<19	<19	<13	<13	<19	<19	>19

WARM DIM PERFORMANCE - 60° OPTIC - SOFT FOCUS LENS


INCANDESCENT DIMMING PROFILE

90W15AL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2650	2620	2520	2180	1950	1800
Light Output (Lm)	884	707	619	442	177	88.4	18
Power (W)	15	12	10.5	7.5	3	1.5	0.3
Efficacy (LPW)	59	59	59	59	59	59	60

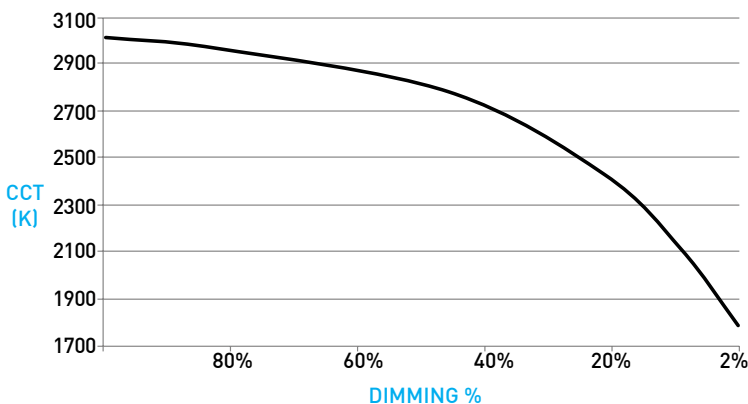

STANDARD DIMMING PROFILE

90W15AD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	920	736	644	460	184	92	18.4
Power (W)	15	12	10.5	7.5	3	1.5	0.3
Efficacy (LPW)	61	61	61	61	61	61	61


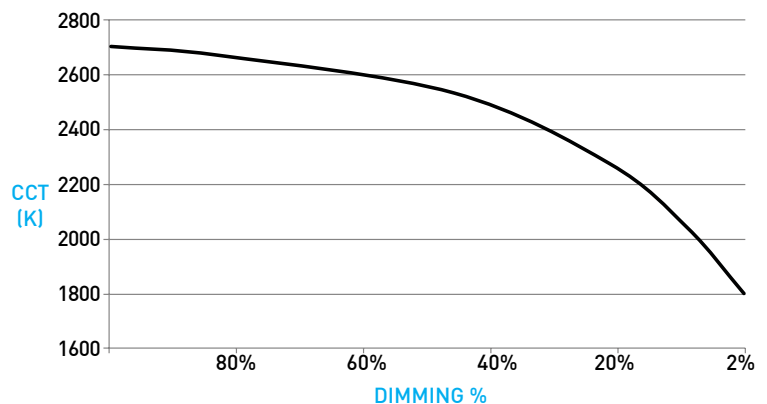


FRAXION SLOPED FIXED DOWNLIGHT

DOWNLIGHT / HOUSING

- A PITCH ADJUSTMENT**
Tilting mechanism is integral to the housing, provides lockable tilt for 3/12 (15°) - 12/12 (45°) slope ranges. Ships in 12/12 (45°) position (see **J** tilt guide).
 - B LED**
Integral LED module design enables field service / replacement through housing aperture.
 - C OPTIC**
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
 - D TRIMLESS WOOD SPACERS**
Provided for Trimless Wood installations; includes (1) 1/16" spacer and (5) 1/8" spacers.
 - E TRIM EXTENSIONS**
Provided for -2 and -3 ceiling thickness; accommodate 2.25" max ceiling thickness.
 - F MICROFLANGE PROFILE**
Features 0.30" flange. Thickness measures 0.06". Installed after ceiling is complete. Round requires 5.4" diameter cutout, and square requires 5.57" x 5.66" cutout. Wet location features integral silicone gasket.
 - G TRIMLESS DRYWALL PROFILE**
Installs totally flush with the ceiling with no visible trim. Appliqué has 0.07" plaster stop. Not recommended for stucco applications.
 - H MEDIA / LENS RETAINER**
Fixture is limited to 1 media, Soft Focus Lens standard. Lens retainer allows media to be changed in Dry /Damp and Wet locations.
 - H1 ADJUSTABLE HCL ASSEMBLY**
Honeycomb Louver and Soft Focus Lens attach directly to optic with clip-on lens retainer and adjusts with fixture. Only compatible with no lens baffle. Dry/Damp locations only. Specified as -28 Media.
 - I ROUND BAFFLE**
Removable baffle provides easy access to tilting mechanism. Minimizes aperture glare and conceals view into housing; includes gasket. Available in two slope ranges 3/12 - 7/12 (15° - 30°) **K** and 7/12 - 12/12 (30° - 45°) **M**.
- SQUARE TRANSITIONAL BAFFLE**
Removable baffle provides easy access to tilting mechanism. Transitions from square aperture at ceiling plane to round aperture at light source. Minimizes aperture glare and conceals view into housing; includes gasket. Available in two slope ranges 3/12 - 7/12 (15° - 30°) **L** and 7/12 - 12/12 (30° - 45°) **N**.

DIMENSIONS / DRAWINGS

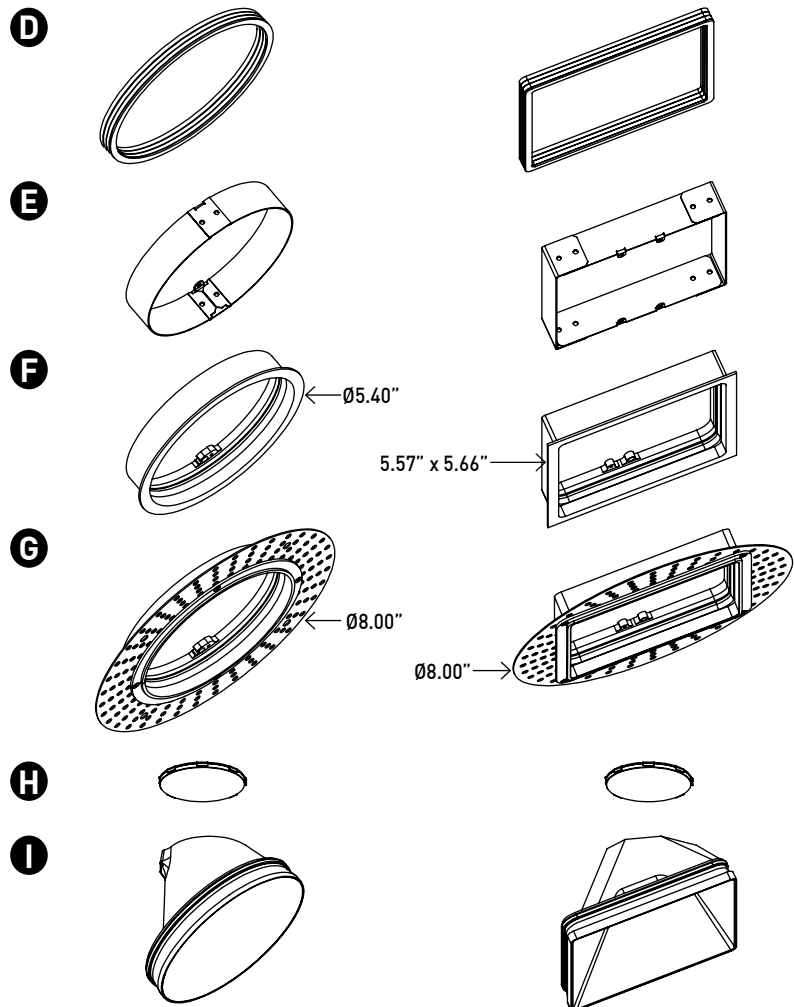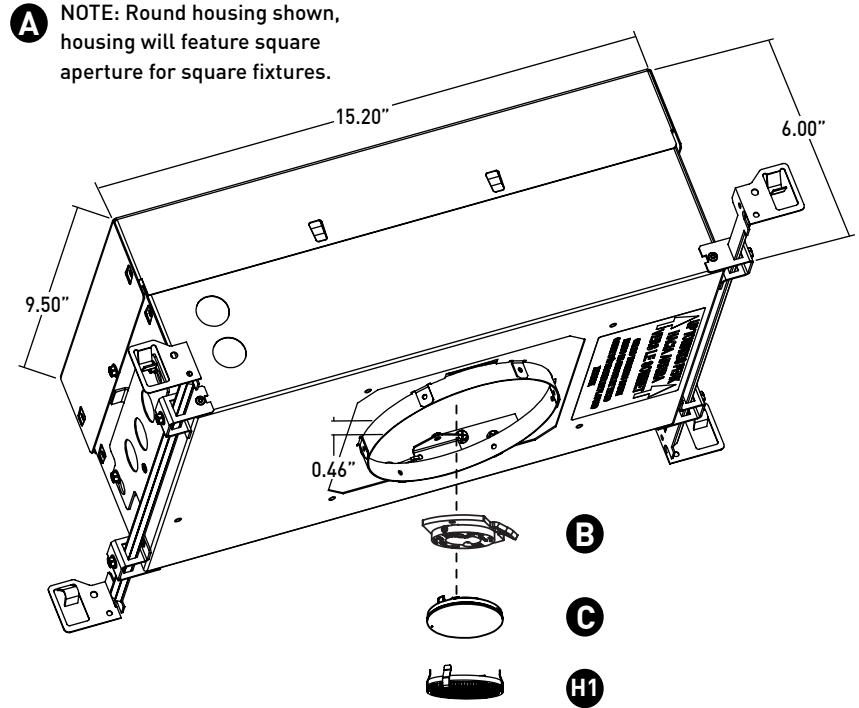


FRAXION SLOPED FIXED DOWNLIGHT

TILT / BAFFLE





1 TILT GUIDE

Displays tilt indicators to adjust trim to ceiling pitch.





DIMENSIONS / DRAWINGS

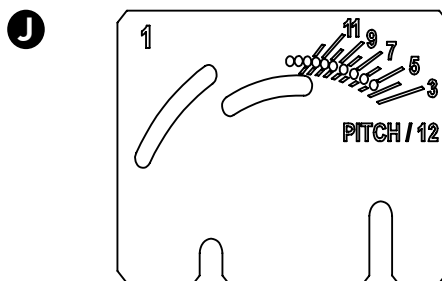

SLOPE 1 BAFFLE: 15° - 30° (3/12 - 7/12) SLOPE RANGES

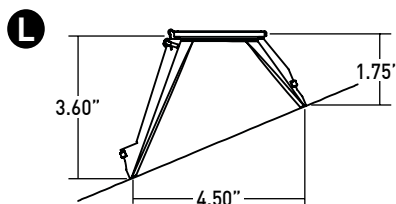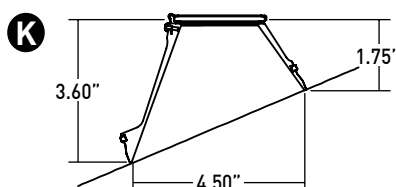

SLOPE 2 BAFFLE: 30° - 45° (7/12 - 12/12) SLOPE RANGES

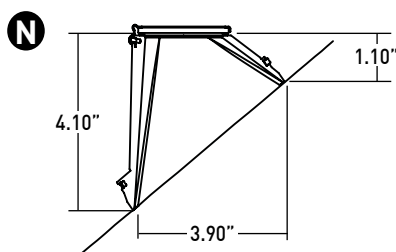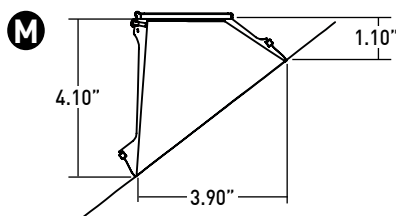

FRAZION SLOPED FIXED DOWNLIGHT




DOWNLIGHT / HOUSING

- Q** **TRIMLESS APPLIQUÉ DETAIL**
Integrated appliqué for plaster floating directly to baffle.
- P** **IC / NON-IC HOUSING**
 - For IC or Non-IC ceilings.
 - CCEA, Airtight and Title 24 (JA8) listed.
 - Accommodates max 1650 delivered lumens.
 - No setback from polycell spray foam insulation having max R-Value of 60 on all sides and top of housing.
- Q** **REMOTE POWER SUPPLY**
Provided with install Types "V" and "D". Remote power supply provides additional driver options. Consult page 7 for maximum allowable secondary run lengths between PSF4-RMT and fixture. Must be installed in an accessible location.

HOUSING NOTES


- Do not install in environments where ambient temperatures exceed 40°C (104°F).
- Power supply compartment and all splice connections may be serviced from room side.
- Consult factory for spacing requirements for any installations exceeding R-Value 60.
- Hanger bars fitted to short side of housing; extend from 14.0" to 24.0", but may be field cut to accommodate narrow stud spacing. Can be extended up to 46" maximum with FRX-HBE-46 kit.
- Hanger bars and brackets add 4.00" to the overall dimension, but are exclusive of the setback requirements.
- Housings for round trims feature a round aperture housing collar, and for square trims, a square housing collar, accommodating ceiling thicknesses between 0.50" and 2.25".

DIMENSIONS / DRAWINGS

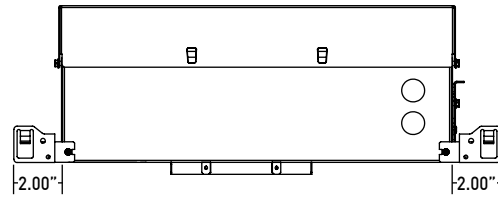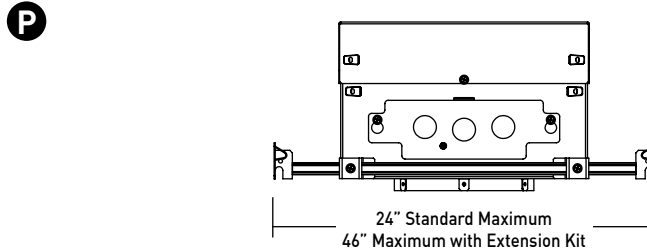


CEILING THICKNESS RANGES

- 1 0.5" - 1.375"
- 2 1.375" - 2.0"
- 3 2.0" - 2.25"

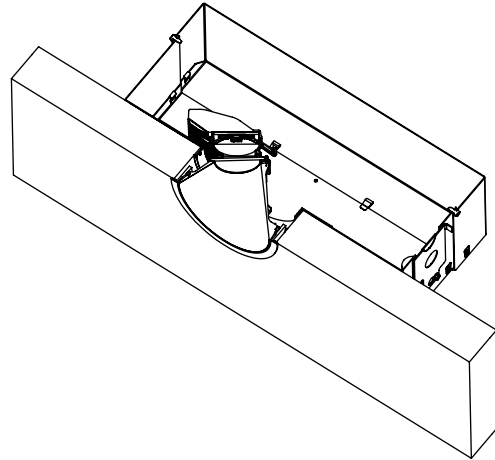

Q

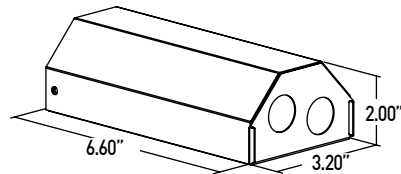

FRAZION SLOPED FIXED DOWNLIGHT

TECHNICAL

CONSTRUCTION

Downlight: Painted finishes are granulated powder coat.

Housing: Aluminum and 22 Gauge galvanized steel.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Aluminum and 22 Gauge galvanized steel.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning range of 2700K to 5000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

Power Supply	ELV		ECO	0-10V								DALI-2	
	PH	L2	LP	SG	SN	AN	LN	EG	EN	DG	DN	ED1	DD1
Minimum °C	-20 °C	0 °C	0 °C	-10 °C	-10 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	0.1%	1.0%	1.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For PH, AN, LN, L2, LH, LP, EG and EN drivers consult chart on page 8 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
PH, SG, SN, AN, LN	285'	180'	113'	71'	45'
L2, LH, LP	60'	40'	25'	15'	-
EG, EN, ED, DG, DN, DD	-	-	118'	72'	46'

LISTING

cTUVus listed to UL1598 standard for Dry / Damp and Wet locations. CCEA, Airtight and Title 24 JA8-2022 Listed. NEMA 410 Compliant.

WEIGHT

Fixture - 9 lbs max

Remote Driver - 1.4 lbs

LIMITED WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult [website](#) for full warranty terms and conditions.

CHANGE LOG

- 03/14/2022: ADDED AN AND LN DRIVER OFFERINGS.
- 10/17/2022: REMOVED 90W13A 3200K-1800K WARM DIM AND ADDED 90W12A 3000K-1800K WARM DIM.
- 08/08/2023: ADDED NEW LED AND OPTIC SYSTEM.

FRAZION SLOPED FIXED DOWNLIGHT

DIMMING COMPATIBILITY

PHILIPS DRIVER COMPATIBILITY

Power supply PH Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	PHPM
Power supply AN Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IlumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV


LUTRON DRIVER COMPATIBILITY

Power supply L2 Lutron Product Family	Part No.
Maestro WirelessR 600 W dimmer	MRF2-6ND-120-
Maestro WirelessR 1000 W dimmer	MRF2-10ND-120-
Caséta® Wireless Pro 1000 W dimmer	PD-10NXD-
GRAFIK T™ CL® dimmer	GT-250M-GTJ-250M-
HomeWorks® QS adaptive dimmer	HQRD-6NA-
HomeWorks® QS 600 W dimmer	HQRD-6ND-
HomeWorks® QS 1000 W dimmer	HQRD-10ND-
RadioRA® 2 adaptive dimmer	RRD-6NA-
RadioRA® 2 1000 W dimmer	RRD-10ND
myRoom™ DIN power module	MQSE-4A1-D
HomeWorks® QS DIN power module	LQSE-4A1-D
HomeWorks® QS wallbox power module	HQRJ-WPM-6D-120
HomeWorks® wallbox power module	HWI-WPM-6D-120
GRAFIK Eye® QS control unit	QSGR-, QSGRJ-
GRAFIK Eye® 3000 control unit	GRX-3100-GRX-3500-
RPM-4U module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4U-120 LP-RPM-4U-120
RPM-4A module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4A-120, LP-RPM-4A-120
GP dimming panels	Various
Ariadni CL 250W dimmer	AYCL-253P-
Diva CL 250W dimmer	DVCL-253P-DCSCCL-253P-
Nova T CL 250W dimmer	NTCL-250-
Power supply LH / LP Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-ECO32-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _E (wireless) QSGR- _E
Quantum Hub	QP2-__ 2C
Quantum Hub	QP2-__ 4C
Quantum Hub	QP2-__ 6C
Quantum Hub	QP2-__ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	

eldoLED DRIVER COMPATIBILITY

Power supply EA2 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply LA2 Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

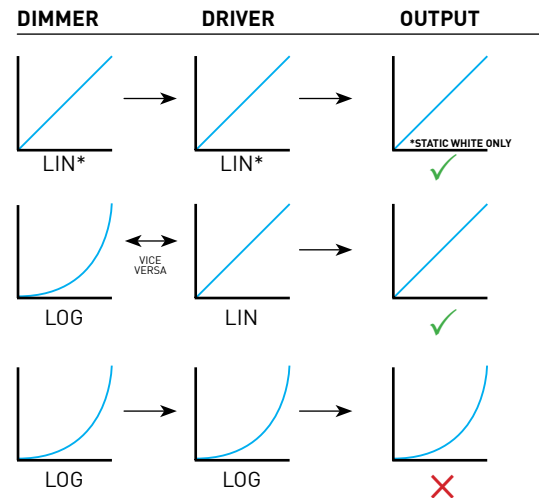

LIN = LINEAR
 LOG = LOGARITHMIC
 *LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM

