


Lighting

Lamping | Fixtures

TOP PICK

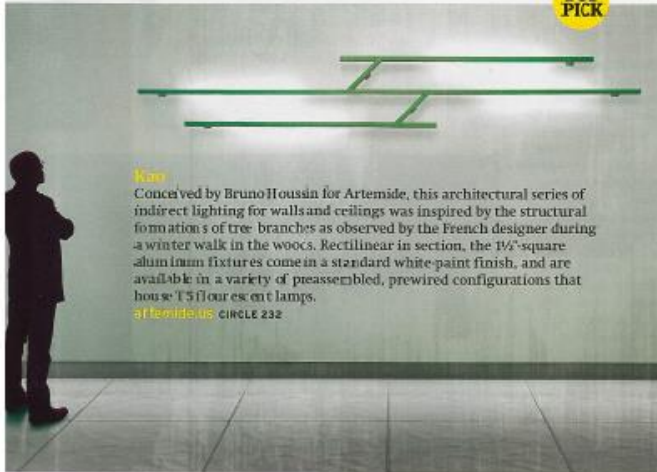


Item
 Conceived by Bruno Housain for Artemide, this architectural series of indirect lighting for walls and ceilings was inspired by the structural formations of tree branches as observed by the French designer during a winter walk in the woods. Rectilinear in section, the 1 1/2"-square aluminum fixtures come in a standard white-paint finish, and are available in a variety of preassembled, prewired configurations that house T5 fluorescent lamps.
artemide.us CIRCLE 232



Cylinder LED Luminaire CYLA3
 This surface-mounted fixture from the Lucifer Lighting Company was designed for ease of installation and use, but it is also easy on the eye. The compact 2 1/4"-diameter x 6 1/2"-high cylinder has an integral heat sink and features a tilt of up to 45° and 361° rotation with toolless adjustment. Dimmable LED options include: 2,700K to 4,000K color temperatures; 25°, 40°, or 60° beam spreads; and a color rendering index (CRI) of 80+ or 95+. It comes in brushed aluminum and powder-coated finishes in matte white or black, metallic gray, and bronze. **luciferlighting.com** CIRCLE 233



Light Sheet
 This incredibly lithe LED system from Cooledge Lighting combines mechanical, electrical, and light source in one flexible sheet that, according to the manufacturer, eliminates the typical heat concerns of LEDs. Made up of a dense array of small, low-power light emitting diodes on a plastic substrate, the Light Sheet allows for a wide variety of design applications, offering over 100 configurations of lumen output, color temperature, width, and length. **cooledgelighting.com** CIRCLE 238

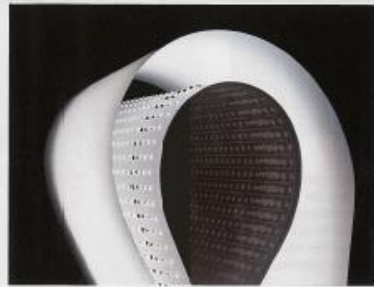

1 Puck LP
 Codesigned by a product engineer and architect, this 1 1/4"-diameter recessed LED luminaire from Minimis has an extremely tiny aperture yet is said to be powerful enough to wash a 12' to 14' wall in light. Ideal for indoor or outdoor use in drillable surfaces such as floors, decks, walls, ceilings, and soffits, the 1 Puck LP is made of solid marine-grade aluminum and is available in Warm White (2,700K to 3,200K) or Pure White (5800K to 6300K) color temperatures. **miniled.net** CIRCLE 237

