

# FRAXION®3 SLIM

## DEEP REGRESS

- Max output of 1548lm at 80+ CRI
- Deep regress baffle options in round and square featuring UGR as low as 1
- Integral drivers for tunable white with our 2 ranges, 1800K to 4000K and 2700K to 5000K
- Now available for remodel and concrete pour applications. See separate spec sheet

### ORDERING INFORMATION - FIXTURE



JA8-2022 INDICATED BY SHADING

SHAPE	RATING	TYPE	FINISH	BAFFLE FINISH	CRI	WATTAGE	CCT	OPTIC (UGR)	MEDIA	INSTALL TYPE	CEILING THICKNESS	DRIVER
F3RD Round Deep Regress	1 IP20 Dry/Damp	A Adjustable	POWDERCOAT MICROFLANGE	POWDERCOAT	STATIC WHITE	STATIC WHITE 06D 06W - 524 Lm 09H 09W - 363 Lm* * (For use with 10° optic only)	24 2400K* * (90+ CRI 11D, 15D, and 09H only) 27 2700K 30 3000K 35 3500K 40 4000K	10 10°* (<10) * (09H package only) 15 15° (<13) 25 25° (<13) 35 35° (<16) 50 50° (<19) 80 80°* (>19) * (Requires -07 WDL media)	STANDARD MEDIA 04 Soft Focus Lens* * (Required for 10° Optic) ALTERNATE MEDIA 01 Honeycomb Louver* * (Not available for IP64 Wet Location, Adjustable Fixtures, or Warm Dim) 02 Clear Glass Lens* * (Not available for Warm Dim) 03 Frosted Glass Lens 05 Frosted Soft Focus Lens 06 Frosted Linear Spread Lens 07 Wide Distribution Lens* * (Required and only available for 80° optic) HS Adjustable Honeycomb Louver and Soft Focus Lens* * (Not available for IP64 Wet Location, 21W, or Fixed Fixtures) NL No Lens* * (Not available for IP64 Wet Location or Warm Dim)	INTEGRAL DRIVER IC IC NC NIC AT IC, Airtight CP CCEA Chicago Plenum REMOTE DRIVER IR IC, Remote NR NIC, Remote AR IC, Airtight, Remote CR CCEA Chicago Plenum, Remote	1 0.50" - 1.375" 2 1.375" - 2.125" * (Adjustable only available for 10° and 15° optic) T 0.50" - 1.375" * (Includes adjustable housing height bracket, recommended for T-Grid applications) G 1.375" - 2.125" * (Adjustable only available for 10° and 15° optic. Includes adjustable housing height bracket, recommended for T-Grid applications)	INTEGRAL / REMOTE PH1 Forward / Reverse Phase, 2%, 120V SG3 eldoLED, ECOdrive 1%, 0-10V, LOG, 120V-277V SN3 eldoLED, ECOdrive 1%, 0-10V, LIN, 120V-277V EG1 eldoLED, SOLOdrive 0.1% 0-10V, LOG, 120V-277V EN1 eldoLED, SOLOdrive 0.1% 0-10V, LIN, 120V-277V ED1 eldoLED, SOLOdrive 0.1% DALI-2, LOG, 120V-277V LP1 Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black, 120V or 277V AS1/ ASR Athena Control eldoLED, SOLOdrive 0.1%, 120V-277V* * (Includes Athena Node. Extended lead time, consult factory. ASR includes EM Shunt) CS1/ CSR Casambi Control eldoLED, SOLOdrive 0.1%, 120V-277V* * (Includes Casambi Node. Extended lead time, consult factory. CSR includes EM Shunt) TUNABLE WHITE INTEGRAL (120-277V) MG1 0.1% 0-10V, LOG MN1 0.1% 0-10V, LIN MD2 0.1% DALI-2 DT8, LOG AM1/ AMR* Athena Control 0.1% * (Includes Athena Node. Extended lead time, consult factory. AMR includes EM Shunt) CM1/ Casambi Control 0.1% CMR* * (Includes Casambi Node. Extended lead time, consult factory. CMR includes EM Shunt) SEE PAGE 6 FOR ELDOLED TUNABLE WHITE DRIVER OPTIONS
F3SD Square Deep Regress	2 IP64 Wet*	F Fixed	WH White	WH White	80S 80+	11D 11W - 842 Lm	15D 15W - 1138 Lm	19D 19W - 1537 Lm				
F3TD Square Transitional Deep Regress			AB Architectural Bronze	AB Architectural Bronze	90S 90+							
			AG Satin Silver	AG Satin Silver	95S 95+							
			AU Cashmere Gold	AU Cashmere Gold								
			BB Burnt Bronze	BB Burnt Bronze								
			BK Black	BK Black								
			PR Primer	PR Primer								
			CF Custom Finish* * (Consult Factory)	CF Custom Finish* * (Consult Factory)								
			TRIMLESS									
			TG Trimless Gypsum 1/16"									
			TM Trimless Millwork									
					WARM DIM	WARM DIM 90W 90+ 11D 90+ CRI, 11 Watts 16D 90+ CRI, 16 Watts Incandescent Profile 11D Lumens Divd. - 489 16D Lumens Divd. - 684 Halogen Profile 11D Lumens Divd. - 495 16D Lumens Divd. - 693 SEE PAGE 4 FOR DETAILED WARM DIM PROFILE COMPARISON.	WL 2600K (11D) 2700K (16D) - 1800K WD 2900K (11D) 3000K (16D) - 1800K	25 25° (<13) 35 35° (<16) 50 50° (<19) 80 80°* (>19) * (Requires -07 WDL media)				
					TUNABLE WHITE	TUNABLE WHITE 90T 90+ 10D 10W Warm Profile: 4000K - 1800K 746 Lm Cool Profile: 5000K - 2700K 657 Lm	TR 4000K - 1800K TH 5000K - 2700K	15 15° (<13) 25 25° (<13) 35 35° (<16) 50 50° (<19) 80 80°* (>19) * (Requires -07 WDL media)				



LUMEN DELIVERED OUTPUTS REFLECT 80+ CRI / 3000K PAIRED WITH 25° OPTIC AND SOFT FOCUS LENS



Declare.

LUCIFER®  
LIGHTING COMPANY

luciferlighting.com

©2025 Lucifer® Lighting Company

As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

[PH] +1-210-227-7329 [FAX] +1-210-227-4967

[DATE OF REV: 04172025]

FRAXION3 SLIM DEEP REGRESS

ACCESSORIES

ROUND / SQUARE TRANSITIONAL ALTERNATE MEDIA

IP20 Dry / Damp location only.  
IP64 Wet location requires alternate baffle.

- ☐ CGL-F3RD Clear Glass Lens\*  
\*(Not available for Warm Dim)
- ☐ FGL-F3RD Frosted Glass Lens
- ☐ SFL-F3RD Soft Focus Lens
- ☐ FSFL-F3RD Frosted Soft Focus Lens
- ☐ WDL-F3RD Wide Distribution Lens\*
- \*(Required and only available for 80° beam spread)
- ☐ FLSL-F3RD Frosted Linear Spread Lens

SQUARE ALTERNATE MEDIA

IP20 Dry / Damp location only.  
IP64 Wet location requires alternate baffle.

- ☐ CGL-F3SD Clear Glass Lens\*  
\*(Not available for Warm Dim)
- ☐ FGL-F3SD Frosted Glass Lens
- ☐ SFL-F3SD Soft Focus Lens
- ☐ FSFL-F3SD Frosted Soft Focus Lens
- ☐ WDL-F3SD Wide Distribution Lens\*
- \*(Required and only available for 80° beam spread)
- ☐ FLSL-F3SD Frosted Linear Spread Lens

ADJUSTABLE HCL ASSEMBLY

Dry / Damp location only.

- ☐ OLR-F3RD1-SFL-HCL Adjustable Honeycomb Louver and Soft Focus Lens\*  
\*(Not available for IP64 Wet Location, 19W, or Fixed Fixtures)

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

ASSEMBLY	SHAPE	RATING	FINISH	MEDIA
RBA				
REPLACEMENT BAFFLE ASSEMBLY	F3RD Round Deep Regress F3SD Square Deep Regress F3TD Square Transitional Deep Regress	1 IP20 Dry/Damp 2 IP64 Wet* *(Requires provided suction cup to service or aim & focus)	WH White AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* *(Consult Factory)	LEAVE BLANK FOR SOFT FOCUS LENS (SFL) HCL Honeycomb Louver* *(Not available for IP64 Wet Location, adjustable fixtures, or Warm Dim) CGL Clear Glass Lens* *(Not available for Warm Dim) FGL Frosted Glass Lens FSFL Frosted Soft Focus Lens FLSL Frosted Linear Spread Lens WDL Wide Distribution Lens* *(Required and only available for 80° optic) NL No Lens* *(Not available for IP64 Wet Location or Warm Dim)

DEEP REGRESS REPLACEMENT OPTICS

Interchangeable optics accessible through fixture aperture.

STATIC WHITE

- ☐ RO-35-15-S 15° optic
- ☐ RO-35-25-S 25° optic
- ☐ RO-35-35-S 35° optic
- ☐ RO-35-50-S 50° optic

WARM DIM

- ☐ RO-35-25-W 25° optic
- ☐ RO-35-35-W 35° optic
- ☐ RO-35-50-W 50° optic

TUNABLE WHITE

- ☐ RO-35-15-T 15° optic
- ☐ RO-35-25-T 25° optic
- ☐ RO-35-35-T 35° optic
- ☐ RO-35-50-T 50° optic

T-GRID ACCESSORY KIT

Supplied with ceiling thickness “T” and recommended for installations in T-Grid up to 1.5” tall. Available for ceiling thicknesses from 0.50” - 2.125”.

- ☐ DHA-TG-KIT

FURRING CHANNEL ACCESSORY KIT

Recommended for installations in furring channel. Available for ceiling thicknesses from 0.50” - 2.125”.

- ☐ DHA-FC-KIT

HANGER BAR EXTENDER KIT

Extends hanger bars from 24.0” to 46.0” maximum.

- ☐ FRX-HBE-46 Extender, Hanger Bar

REPLACEMENT APPLIQUÉ

- ☐ DLA-APP-F3RT Round
- ☐ DLA-APP-F3ST Square

REPLACEMENT SUCTION TOOL

One included with every six fixtures designated Wet location.

- ☐ F3D-TOOL-SUCTION Allows for removal of baffle with Wet location

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- ☐ EMB-S-25-120/277-LEDX 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- ☐ EMB-S-100-120-LEDX 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- ☐ EMB-S-100-277-LEDX 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- ☐ EMB-S-250-120/277-LEDX 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

**NOTE:** SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.

FRAXION3 SLIM DEEP REGRESS



LUMEN PACKAGE	WATT-AGE	10° OPTIC FIELD REDUCER KIT		15° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		35° OPTIC SOFT FOCUS LENS		50° OPTIC SOFT FOCUS LENS		80° OPTIC SOFT FOCUS LENS	
		DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW
80S06D	06	-	-	527	88	524	87	477	80	500	83	430	72
80S09H	09	363	33	-	-	-	-	-	-	-	-	-	-
80S11D	11	-	-	848	77	842	77	768	70	805	73	692	63
80S15D	15	-	-	1129	75	1138	76	1038	69	1087	72	935	62
80S19D	19	-	-	1548	74	1537	73	1401	67	1468	70	1263	60
90S06D	06	-	-	446	74	443	74	404	67	423	71	364	61
90S09H	09	312	35	-	-	-	-	-	-	-	-	-	-
90S11D	11	-	-	718	65	713	65	650	59	681	62	585	53
90S15D	15	-	-	970	65	963	64	878	59	920	61	791	63
90S19D	19	-	-	1310	62	1300	62	1185	56	1242	59	1068	51
95S06D	06	-	-	396	66	393	66	358	60	375	63	323	54
95S09H	09	269	18	-	-	-	-	-	-	-	-	-	-
95S11D	11	-	-	637	58	632	57	576	52	604	55	519	47
95S15D	15	-	-	861	57	854	57	779	52	816	54	702	47
95S19D	19	-	-	1162	55	1153	55	1052	50	1102	52	948	45
90W11D (26K-18K)	11	-	-	-	-	489	44	446	41	467	42	402	37
90W11D (29K-18K)	11	-	-	-	-	495	45	451	41	473	43	407	37
90W16D (27K-18K)	16	-	-	-	-	684	43	623	39	653	41	562	35
90W16D (30K-18K)	16	-	-	-	-	693	43	632	40	662	41	570	36
90T10D (50K-27K)	10	-	-	662	66	657	66	586	59	623	62	674	67
90T10D (40K-18K)	10	-	-	752	75	746	75	667	67	708	71	766	77

MAX UNIFIED GLARE RATING

10° OPTIC FIELD REDUCER KIT	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	35° OPTIC SOFT FOCUS LENS	50° OPTIC SOFT FOCUS LENS	80° OPTIC WIDE DISTRIBUTION
<10	<13	<13	<16	<19	>19

\*UGR VALUES REFLECT WHITE BAFFLE AND 19 WATTS, LOWER UGR VALUES AVAILABLE WITH DIFFERENT FINISHES AND LOWER WATTAGES.

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.00
3500K	1.03
4000K	1.08

TUNABLE WHITE MULTIPLIER

CCT	5000K- 2700K	4000K- 1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

MEDIA LIGHT LOSS FACTOR

MEDIA	LIGHT LOSS FACTOR
NO LENS	1.06
CGL	1.00
SFL	1.00
FGL	0.89
FSFL	0.81
FLSL	0.82


# FRAXION3 SLIM DEEP REGRESS

## WARM DIM PERFORMANCE - 25° OPTIC - SOFT FOCUS LENS


INCANDESCENT PROFILE							
90W11DWL 2600K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2600	2550	2520	2450	2200	1925	1800
Light Output (Lm)	489	391	342	244	97	48	9.7
Power (W)	11	8.8	7.7	5.5	2.2	1.1	0.22
Efficacy (LPW)	44	44	44	44	44	44	44
90W11DWL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2650	2620	2520	2180	1950	1800
Light Output (Lm)	684	547	478	342	136	68	13
Power (W)	16	12.8	11.2	8.0	3.2	1.6	0.32
Efficacy (LPW)	43	43	43	43	43	43	43

HALOGEN PROFILE							
90W11DWD 2900K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2900	2850	2800	2720	2350	1975	1800
Light Output (Lm)	495	396	346	247	99	49	9.9
Power (W)	11	8.8	7.7	5.5	2.2	1.1	0.22
Efficacy (LPW)	45	45	45	45	45	45	45
90W16DWD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	693	554	485	346	138	69	13
Power (W)	16	12.8	11.2	8.0	3.2	1.6	0.32
Efficacy (LPW)	43	43	43	43	43	43	43

11W / 16W

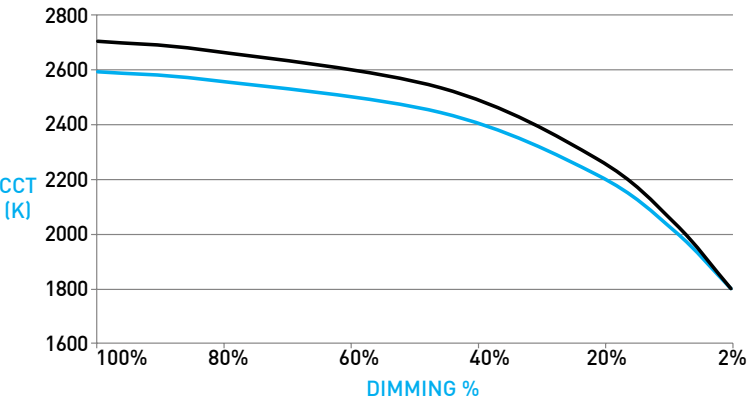

11W / 16W

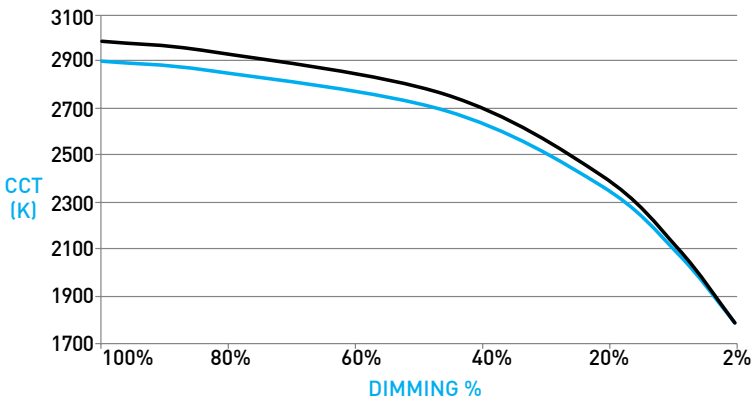


**NOTE:** LIN-TO-LIN 0-10V PAIRING NOT COMPATIBLE WITH WARM DIM.

# FRAXION3 SLIM DEEP REGRESS

## FIXTURE

- A FIXTURE**  
Integral LED module design enables field service / replacement through housing aperture.
  - B OPTIC**  
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering wallwash, 10°, 15°, 25°, 35°, & 50° beams.
  - C 10° FIELD REDUCER**  
Provided with 10° optic. Pairs Soft Focus Lens, Field Reducer, and Honeycomb Louver to deliver tight 10° beam while reducing field angle by 30%.
  - D ADJUSTABLE HCL ASSEMBLY**  
Honeycomb Louver and Soft Focus Lens attach directly to optic with clip-on lens retainer and adjusts with fixture. Only compatible with no lens baffle. Dry/Damp locations only. Specified as "HS" Effects Device
  - E TRIM EXTENSION**  
Provided for -2 ceiling thickness; accommodates 2.125" max ceiling thickness.
  - F MICROFLANGE PROFILE**  
Provides industry standard 0.43" total contractor (goof) allowance with 0.27" flange. Thickness measures 1/16". IP64 Wet location features integral silicone gasket.
  - G TRIMLESS GYPSUM PROFILE**  
Installs totally flush with the ceiling with no visible trim. Features integrated appliqué for plaster floating directly to the baffle. Not recommended for stucco applications.
  - H EFFECTS DEVICES / LENS RETAINER**  
Fixture is limited to 1 effects device installed on the baffle, see Section D for Adjustable HCL assembly. Wet location effects device is sealed in place on baffle, suction tool provided for removal of baffle. Lens retainer allows effects devices to be changed in Dry /Damp locations.
  - I ROUND / SQUARE BAFFLE**  
Die-cast removable baffle provides easy access to adjustment mechanisms for tilt and rotation. Features 60° glare cutoff, minimizing aperture glare and concealing view into housing. Includes gasket, mitigating light leak.
- SQUARE TRANSITIONAL BAFFLE**  
Transitions from square aperture at ceiling to round aperture at light source. Die-cast removable baffle provides easy access to adjustment mechanisms for tilt and rotation. Features 60° glare cutoff, minimizing aperture glare and concealing view into housing. Includes gasket, mitigating light leak.

## DIMENSIONS / DRAWINGS

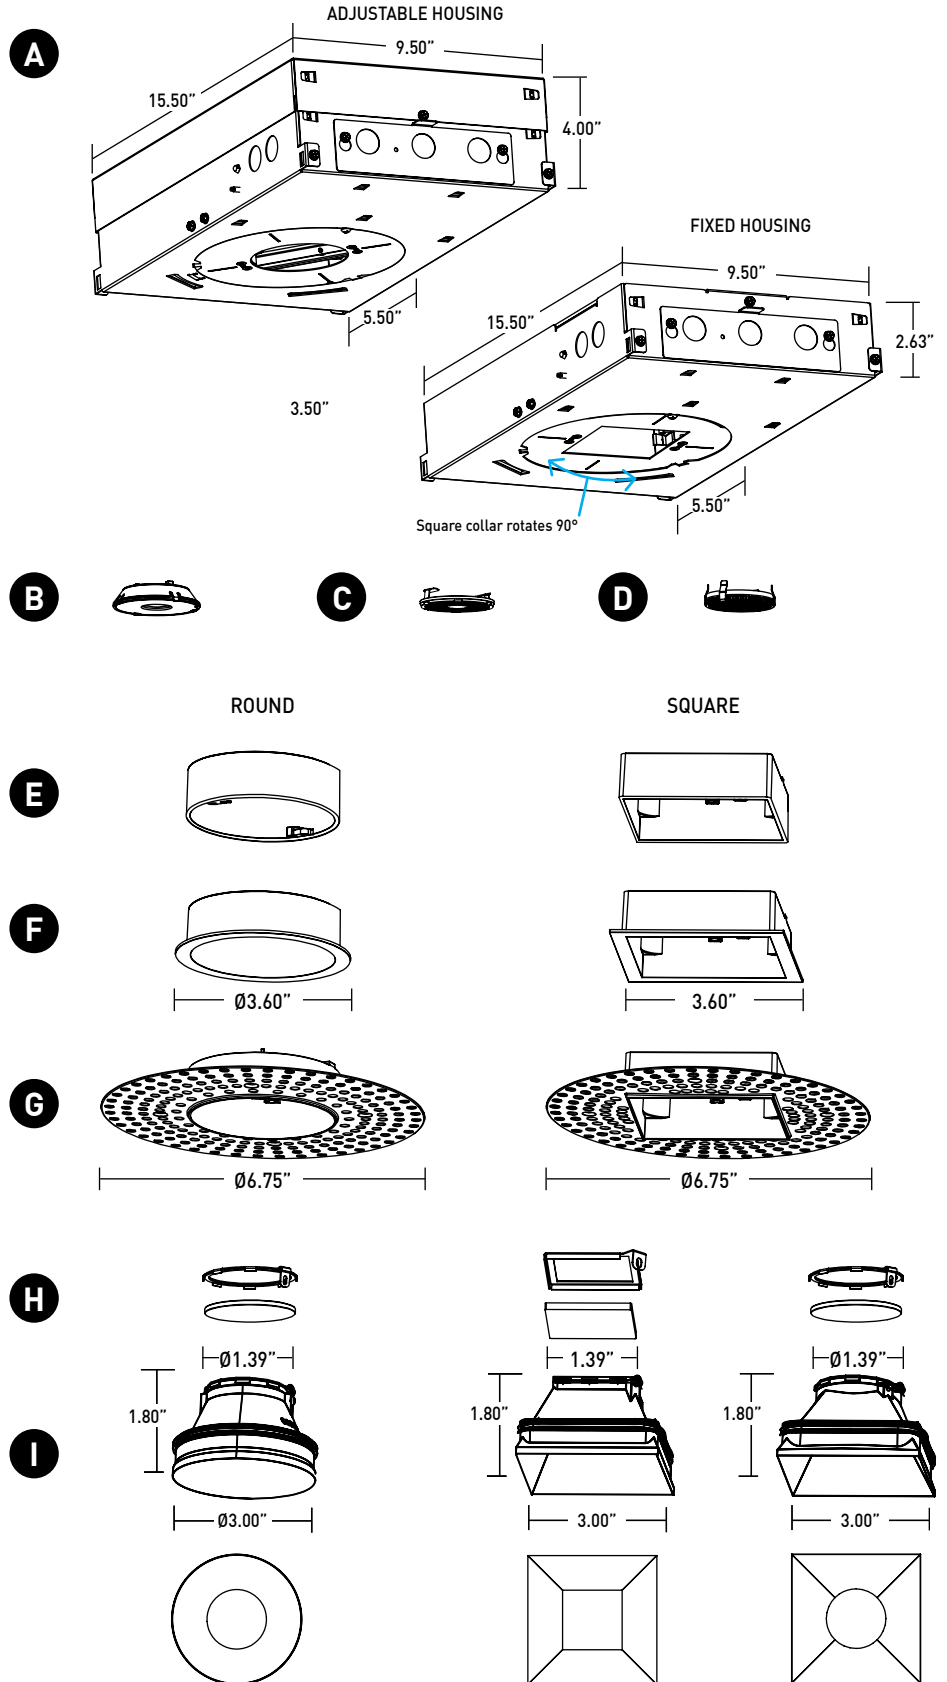

# FRAXION3 SLIM DEEP REGRESS

## FIXTURE

- J IC HOUSING**
- For IC ceilings.
  - No setback from polycell spray foam insulation having max R-Value of 60 on all sides and top of housing.
- K NIC HOUSING**
- Minimum 0.50" setback from combustible and non-combustible materials on all sides and top of housing.
  - Minimum 3.00" setback from insulation material having max R-Value 30 on all sides and top of housing.
  - Minimum 6.00" setback from polycell spray foam insulation having max R-Value 60.
- L ADJUSTABLE HANGER BAR HEIGHT ACCESSORY**
- Provided with ceiling thickness "T" and recommended for installations in T-Grid up to 1.5" tall. Hanger bars are installed to adjustable bracket. Allows housing to be raised and lowered; ceiling thickness remains 0.5" to 2.125" max.
- M ADJUSTABILITY**
- Aiming mechanism is integral to the housing, providing hot-aim tilt up to 40° with Philips screwdriver and 365° rotation with toolless locking tab. Sliding pivot point optimizes center beam, ensuring unclipped beam of 15° at 40° tilt and 25° at 30° tilt. Infinite tilt increments with 1° indicators, tilt guide included.
- N TRIMLESS MILLWORK PROFILE / SPACERS**
- No visible flange, installs totally flush with millwork. Includes (1) 1/16" spacer and (5) 1/8" spacers.
- O APPLIQUÉ DETAIL**
- Appliqué for plaster floating directly to baffle. Provided with 1/16" plaster stop.
- P REMOTE POWER SUPPLY**
- Provided with install Types "IR", "NR", "AR", and "CR". Remote power supply provides additional driver options. See page 7 for maximum allowable secondary run lengths between remote driver and fixture. Must be installed in an accessible location.


### REMOTE ELDOLED TUNABLE WHITE DRIVERS

TUNABLE WHITE REMOTE (120-277V)	
DG1	eldoLED, DUALdrive 0.1% 0-10V, LOG
DN1	eldoLED, DUALdrive 0.1% 0-10V, LIN
DD2	eldoLED, DUALdrive 0.1% DALI-2, LOG
AD1/ADR	Athena Control eldoLED, DUALdrive, 0.1%*
* (Includes Athena Node. Extended lead time, consult factory. ADR includes EM Shunt)	
CD1/CDR	Casambi Control eldoLED, DUALdrive, 0.1%*
* (Includes Casambi Node. Extended lead time, consult factory. CDR includes EM Shunt)	


- Q ATHENA / CASAMBI CONTROL**
- Controls integrated into housing or remote driver assembly. All equipment is serviceable.
- R ATHENA / CASAMBI EM SHUNT**
- Included with drivers specified as ASR, ADR, CSR, or CDR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT


**J / K**

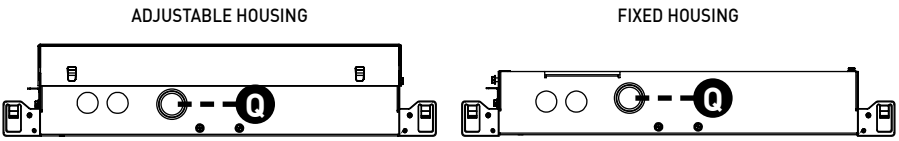


**L**

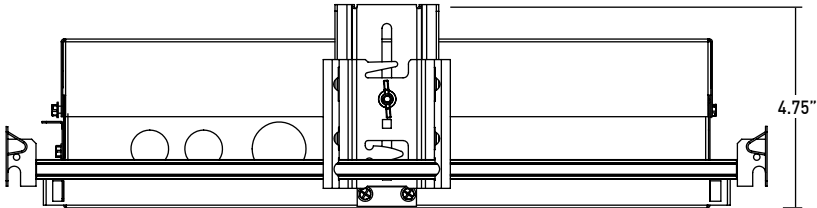


**M**

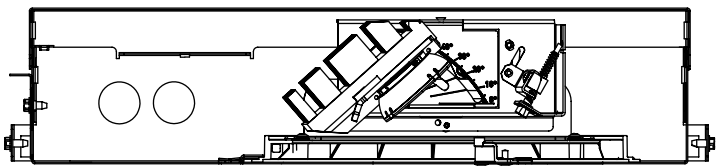


**N**

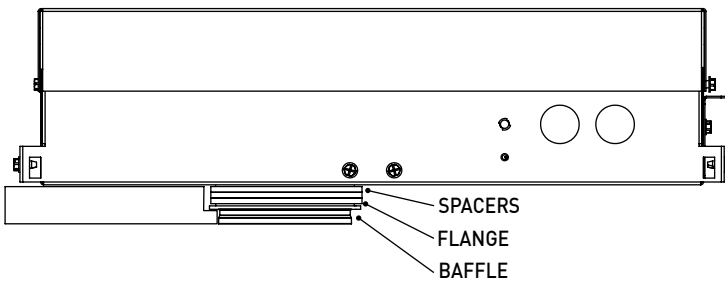


**O**

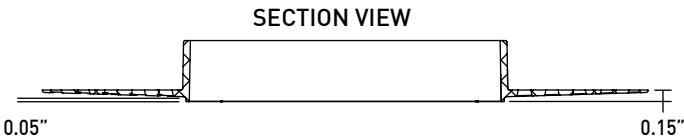


**P**

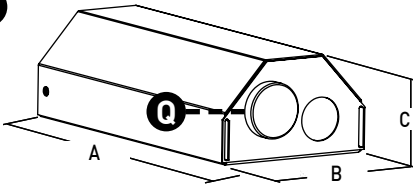

**R**

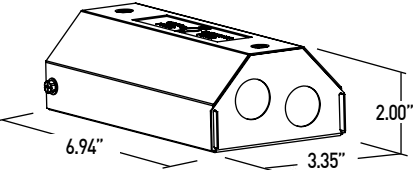

	A	B	C
STATIC WHITE / WARM DIM	6.94"	3.35"	2.00"
TUNABLE WHITE	8.10"	5.00"	2.00"
ATHENA / CASAMBI CONTROLLED	8.10"	5.00"	2.00"



# FRAXION3 SLIM DEEP REGRESS

## TECHNICAL

### CONSTRUCTION

**Downlight:** Painted finishes are granulated powder coat.  
**Housing:** Aluminum and 22 Gauge galvanized steel. Die-cast aluminum heat-sink.  
**Remote Power Supply:** 22 Gauge galvanized steel.  
**Appliqué:** Zinc alloy.

### STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K.  
3-step MacAdam ellipse LED module available in 90+ CRI configuration in color temperature of 2400K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

### WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

### TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

### POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE	0-10V								ECO	DALI-2			ATHENA			CASAMBI		
Power Supply	PH1	SG3	SN3	EG1	EN1	DG1	DN1	MG1	MN1	LP1	ED1	DD2	MD2	AS1	AD1	AM1	CS1	CD1	CM1
Minimum °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-40 °C	-40 °C	0 °C	-20 °C	-20 °C	-40 °C	0 °C	0 °C	-40 °C	-20 °C	-20 °C	-40 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For PH1, LP1, EG1 and EN1 drivers consult chart on page 8 to confirm appropriate dimming curve for compatibility with selected control.

### MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
PH1	285'	180'	113'	71'	45'
LP1	60'	40'	25'	15'	-
EG1, EN1, ED1, DG1, DN1, DD2, AS1, AD1, CS1, CD1	-	-	118'	72'	46'

### LISTING

UL listed to UL1598 standard for Dry / Damp and Wet locations. CCEA, Airtight, and Title 24 JA8-2022 Listed. NEMA 410 Compliant.

### BUY AMERICAN ACT

All Fraxion3 Slim configurations are Buy American Act compliant.

### DECLARE

LBC Red List Approved.

### WEIGHT

Fixture - 7.5 lbs max  
Remote Driver - 1.4 lbs

## HOUSING NOTES

- Do not install housings in environments where ambient temperatures exceed 40°C (104°F), or 35°C (95°F) when using the LP1 driver.
- Power supply compartment and all splice connections may be serviced from room side.
- Consult factory for spacing requirements for any installations exceeding R-Value 60.
- Hanger bars fitted to short side of housing or long side when TG accessory is specified; extend from 14.0" to 24.0", but may be field cut to accommodate narrow stud spacing. Can be extended up to 46" maximum with FRX-HBE-46 kit.
- Hanger bars and brackets add 4.00" max to the overall dimension, but are exclusive of the setback requirements.
- Housings for round trims feature a round aperture housing collar. Housings for square trims feature a square housing collar that rotates up to 90 degrees for fixture alignment. Housing collars accommodate ceiling thicknesses between 0.50" and 2.125".

## LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult website for full warranty terms and conditions.



# FRAXION3 SLIM DEEP REGRESS

## DIMMING COMPATIBILITY

### PHILIPS DRIVER COMPATIBILITY

Power supply PH1 Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	PHPM

### LUTRON DRIVER COMPATIBILITY

Power supply LP1 Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- E (wireless) QSGR- E
Quantum Hub	QP2- __ 2C
Quantum Hub	QP2- __ 4C
Quantum Hub	QP2- __ 6C
Quantum Hub	QP2- __ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



### eldoLED DRIVER COMPATIBILITY

Power supply EG1 / SG3 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply EN1 / SN3 Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1

## ANALOG DRIVERS AND DIMMERS

