

# CYLINDER 4

## SUSPENDED CABLE

Highlight art, objects, places, spaces, seating areas, and architectural details with a classic profile that offers easy-to-adjust, in-field versatility.

PROJECT NAME:

TYPE:



### ORDERING INFORMATION




JA8-2022 COMPLIANCE INDICATED BY SHADING

CYLINDER	CABLE	CABLE COLOR	FUNCTION	RATING	CYLINDER FINISH	BAFFLE FINISH	CRI / WATTAGE PACKAGE	CCT	DOWN OPTIC (UGR)	DRIVER	EFFECTS DEVICE	MOUNTING
CP4X												
CP4X 4.90"	096 8 Feet 192 16 Feet	W White B Black	FB Down Only UD Up / Down	1 Dry/Damp (IP30) 2 Wet (IP55)* *(Not available for Up / Down "UD")	WH White	WH White	STATIC WHITE	24 2400K* *(90+ CRI only)	15 15° (<10)	INTEGRAL 1PH 120V 1% Forward / Reverse* *(30E Wattage Package Only) 1SG 120 or 277V 1% 0-10V Analog, LOG 1SN 120 or 277V 1% 0-10V Analog, LIN  REMOTE (120-277V) 1LH Lutron, Hi-Lume 1% Ecosystem eldoLED, 0.1% 0-10V, LOG 1EG eldoLED, 0.1% 0-10V, LIN 1EN eldoLED, 0.1% 0-10V, LIN 1ED eldoLED, 0.1% DALI, LOG UAS1 / Athena Control eldoLED, 0.1% 120-277V* UCS1 / Casambi Control eldoLED, 0.1% 120-277V* *(Includes Node. Extended lead time, consult factory. UASR/UCSR includes shunt)  TUNABLE WHITE REMOTE (120-277V) 1DD eldoLED, DUALdrive 0.1% DALI, LOG 1DG eldoLED, DUALdrive 0.1% 0-10V, LOG 1DN eldoLED, DUALdrive 0.1% 0-10V, LIN UAD1 / Athena Control eldoLED, DUALdrive 0.1% 120-277V* UADR eldoLED, DUALdrive 0.1% 120-277V* CD1 / Casambi Control eldoLED, DUALdrive 0.1% 120-277V* *(Includes Node. Extended lead time, consult factory. UADR/UCDR includes shunt)	STANDARD EFFECTS DEVICE 4 Soft Focus Lens  OPTIONAL EFFECTS DEVICE 0 No Lens* *(Not available for Wet locations) 2 Honeycomb Louver* *(Not available for Wet locations) 3 Clear Glass Lens 5 Frosted Glass Lens 6 Frosted Soft Focus Lens 7 Frosted Linear Spread Lens  *THIS SECTION ONLY PERTAINS TO DOWNLIGHT SOURCE. **ALL EFFECTS DEVICES ARE T24 COMPLIANT FOR STATIC WHITE.	JBOX Standard, J-Box Surface Mounting Plate CMJB 1/2" and 3/4" Conduit Ceiling Mount Junction Box* *(Not available for Wet locations)
					AG Satin Silver	AG Satin Silver	80S15E 80+ CRI, 15 Watts Lm. Delivered - 1579	27 2700K	25 25° (<10)			
					AU Cashmere Gold	AU Cashmere Gold	80S30E 80+ CRI, 30 Watts Lm. Delivered - 3104	30 3000K	40 40° (<10)			
					AB Architectural Bronze	AB Architectural Bronze	90S15E 90+ CRI, 15 Watts Lm. Delivered - 1410	35 3500K	60 60° (<16)			
					BB Burnt Bronze	BB Burnt Bronze	90S30E 90+ CRI, 30 Watts Lm. Delivered - 2667	40 4000K				
					BK Black	BK Black	97S15E 97+ CRI, 15 Watts Lm. Delivered - 1269*					
					CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	97S30E 90+ CRI, 30 Watts Lm. Delivered - 2342*					
							97S30E 90+ CRI, 30 Watts Lm. Delivered - 2342*					
							97S30E 90+ CRI, 30 Watts Lm. Delivered - 2342*					
							97S30E 90+ CRI, 30 Watts Lm. Delivered - 2342*					
							TUNABLE WHITE		15 15° (<10)			
							90T30B 90+ CRI, 30 Watts* Cool Profile Lm. Delivered - 2231*	TH 5000K - 2700K	25 25° (<10)			
							Warm Profile Lm. Delivered - 2084	TR 4000K - 1800K	40 40° (<10)			
							90T39B 90+ CRI, 39 Watts Cool Profile Lm. Delivered - 2720*	TH 5000K - 2700K	60 60° (<16)			
							Warm Profile Lm. Delivered - 2587*	TR 4000K - 1800K				
							*ALL DELIVERED LUMEN OUTPUTS AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 40° AND STANDARD MEDIA.					

\*FOR CABLE LENGTHS OVER 16' CONSULT FACTORY. ALL LENGTHS ARE FIELD-CUTTABLE.

### POWDERCOAT FINISHES

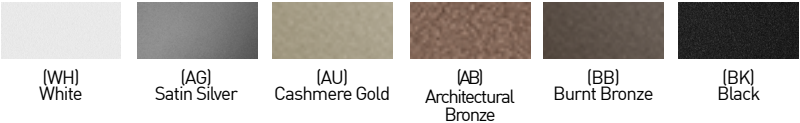

### PART NUMBER NOTES

- CP4X-FB ships as e.g., CP4X192WFB1WHBK80S30A131PH\*4
- CP4X-UD ships as e.g., CP4X096BUD1AGBK90S30A131SG\*4
- Downlight remote driver ships as e.g., PSCY4X-RMT-90C-29B-LH\*
- Uplight remote driver ships as e.g., PSCY4X-RMT-UPLIGHT-LH\*
- CMJB ships as CY4X-CMJB-(finish)



# CYLINDER 4 SUSPENDED CABLE

## ACCESSORIES

### DOWNLIGHT ALTERNATE EFFECTS DEVICES - INCLUDES LENS RETAINER

- ☐ **HCL-CY4X-01** Honeycomb Louver \*  
\*(Not available for Wet location)
- ☐ **CGL-CY4X-01** Clear Glass Lens
- ☐ **SFL-CY4X-01** Soft Focus Lens
- ☐ **FGL-CY4X-01** Frosted Glass Lens
- ☐ **FSFL-CY4X-01** Frosted Soft Focus Lens
- ☐ **FLSL-CY4X-01** Frosted Linear Spread Lens

### REPLACEMENT OPTIC ASSEMBLIES

- ☐ **RO-90-15** 15° optic
- ☐ **RO-90-20** 20° optic
- ☐ **RO-90-25** 25° optic
- ☐ **RO-90-40** 40° optic
- ☐ **RO-90-60** 60° optic

### EMERGENCY LIGHTING - REMOTE MOUNT ONLY

- ☐ **EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- ☐ **EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

## PERFORMANCE - 3000K - SOFT FOCUS LENS



JA8-2022 INDICATED BY SHADING

LUMEN PACKAGE	WATTAGE	15° OPTIC		25° OPTIC		40° OPTIC		60° OPTIC		UPLIGHT	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S15E	15	1599	107	1542	103	1579	105	1500	100	1148	82
80S30E	30	3193	106	3030	101	3104	103	2930	98	1148	82
90S15E	15	1428	106	1377	103	1410	105	1339	100	1038	74
90S30E	30	2743	91	2603	87	2667	89	2517	84	1038	74
97S15E	15	1285	86	1293	83	1269	85	1205	80	-	-
97S30E	30	2408	80	2285	76	2342	78	2210	74	-	-
90T30BH (5000K-2700K)	30	2313	77	2197	73	2331	74	2110	70	-	-
90T39BH (5000K-2700K)	39	2827	72	2720	70	2770	71	2628	67	-	-
90T30BR (4000K-1800K)	30	2160	72	2052	68	2084	69	1971	66	-	-
90T39BR (4000K-1800K)	39	2640	68	2540	65	2587	66	2454	63	-	-

OUTPUT MULTIPLIER	
CCT	CCT SCALE
2400K	0.76
2700K	0.97
3000K	1.00
3500K	1.03
4000K	1.08

MEDIA LIGHT LOSS FACTOR	
MEDIA	LIGHT LOSS FACTOR
NO LENS	1.05
CGL	1.00
SFL	1.00
FGL	0.89
FSFL	0.87
FLSL	0.82
HCL	0.65

UNIFIED GLARE RATING			
15° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
<10	<10	<10	<16



TUNABLE WHITE MULTIPLIER		
CCT	5000K- 2700K	4000K- 1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

# CYLINDER 4 SUSPENDED CABLE

## FIXTURE

- A LUMINAIRE**  
Body with integrated heat sink and LED(s). Power supply may be integral or remote mount.
- B CANOPY**  
Die-cast canopy accommodates flat and sloped ceiling conditions. Conceals hidden twist-on mounting hardware. Available with integral or remote driver.
- C CABLE**  
Black or White wiring harnesses are available. Available in lengths up to 192" maximum, cable is field cuttable, consult factory for lengths greater than 192".
- D UPLIGHT OPTIC**  
120° Spread lens; Uplight only available for Dry/Damp locations.
- E DOWNLIGHT OPTIC**  
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 15°, 25°, 40° & 60° beams.
- F LENS RETAINER**  
Threaded lens retainer attaches to baffle and accommodates up to two effects devices.
- G DOWNLIGHT MEDIA**  
Soft focus lens standard. Media is field-changeable in Dry/Damp and Wet locations.
- H BAFFLE**  
Die-cast baffle minimizes aperture glare and conceals view into fixture.

## DIMENSIONS / DRAWINGS

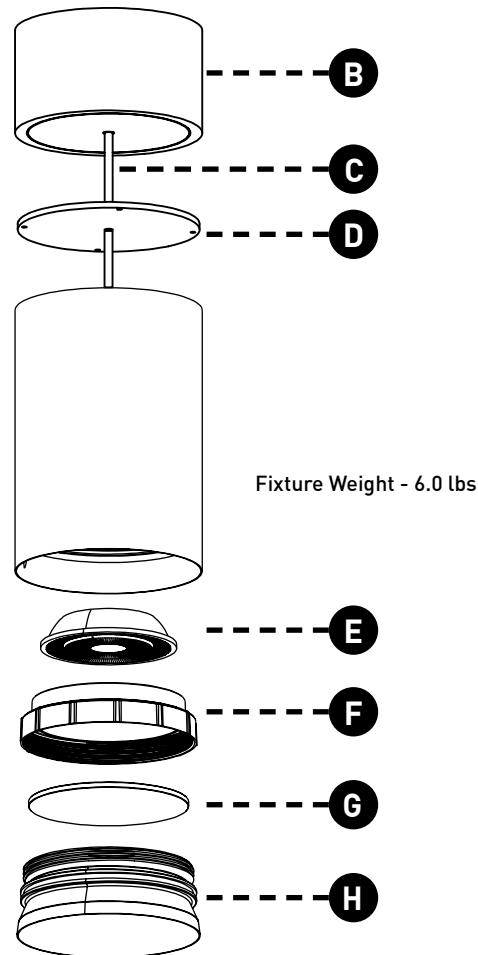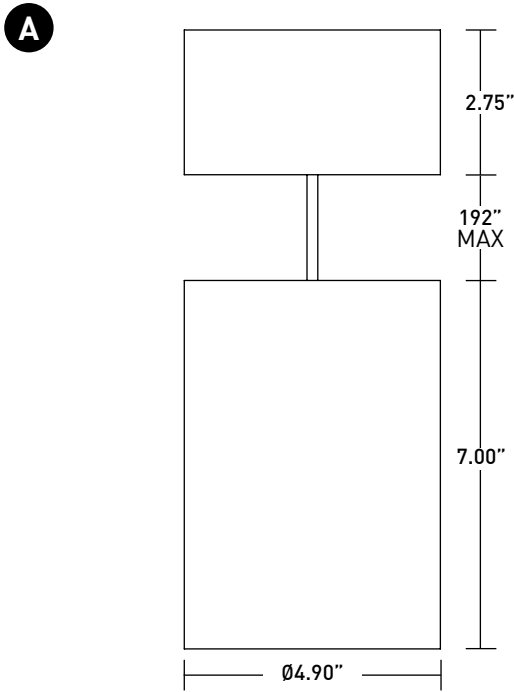

# CYLINDER 4 SUSPENDED CABLE


## MOUNTING

- I MOUNTING ADAPTOR**  
Mounting adaptor (concealed) for standard 3/0 and 4/0 j-boxes. Surface mounted, does not require installation prior to rough-in. Fixture mounts flush with minimalist transition to ceiling.
- J CMJB**  
Ceiling mount junction box perfectly matches the cylinder profile for a continuous, integrated look where exposed ceiling mount junction box and conduit applications apply. For use with 1/2" and 3/4" EMT conduit only. Features three conduit entrances at 12, 3, and 6 o'clock plus one conduit knockout on top. Painted finishes only. Blank off plugs included.

## REMOTE POWER SUPPLY

- K PS-RMT**  
Do not install in environments where ambient temperatures exceed 35°C (95°F). Remote power supply provides additional driver options. Mounting device still required. Consult install guide for maximum allowable secondary run lengths between PS-RMT and fixture.
- L ATHENA / CASAMBI CONTROL**  
Controls integrated into remote driver assembly. All equipment is serviceable.  
Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI  
Casambi Model Number: BT-S1E1-5400
- M ATHENA / CASAMBI EM SHUNT**  
Included with drivers specified as UASR, UADR, UCSR, or UCDR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.  
Model Number: PS-RMT-SHUNT

## DIMENSIONS / DRAWINGS

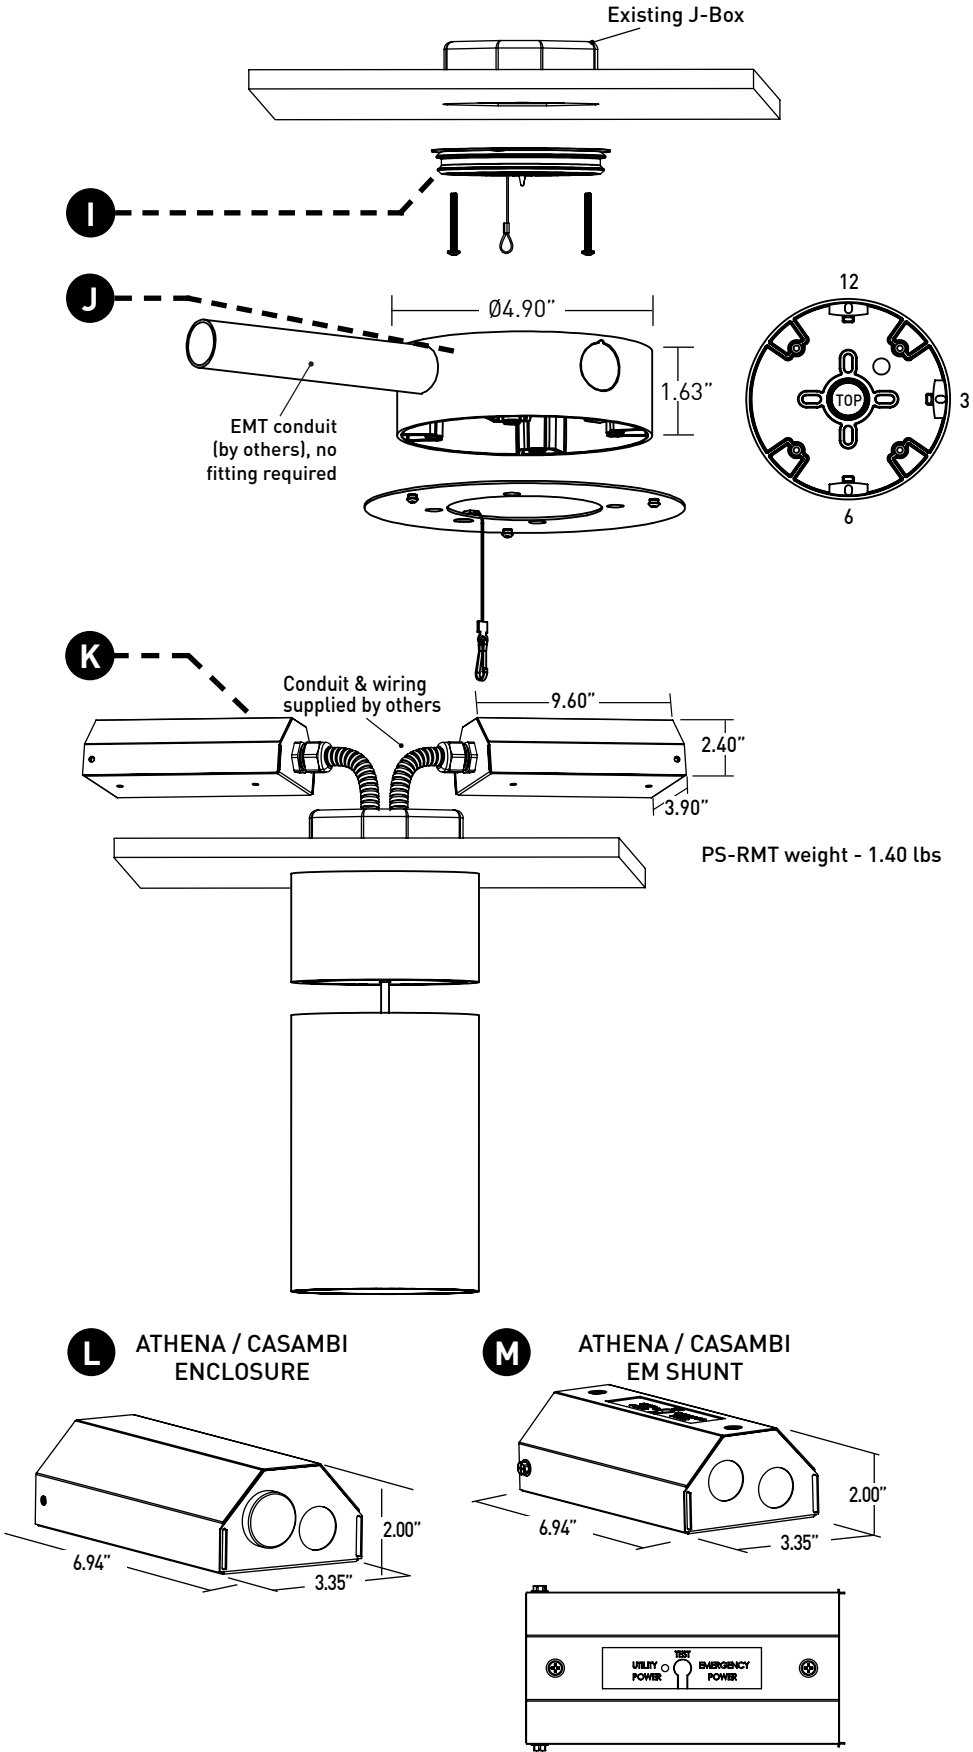

# CYLINDER 4 SUSPENDED CABLE

## UP / DOWNLIGHT FIXTURE CONTROL INFORMATION

DRIVER	DRIVER QUANTITY	SOURCES DIM INDEPENDENTLY OR TOGETHER	WIRING REQUIREMENTS
1PH	2	X	For independent control, two switch legs required.
1SG	2	X	For independent control, two switch-legs and two 0-10V control leads required.
1SN	2	X	For independent control, two switch-legs and two 0-10V control leads required.
1LH	2	X	For independent control, two EcoSystem addresses required.
1ED	1	X	For independent control, two DALI addresses required.
1EG	2	X	For independent control, two switch-legs and two 0-10V control leads required.
1EN	2	X	For independent control, two switch-legs and two 0-10V control leads required.

# CYLINDER 4 SUSPENDED CABLE

## TECHNICAL

### CONSTRUCTION

**Cylinder:** Machined aluminum body; extruded aluminum internal heat-sink; painted finishes are granulated powder coat.  
**CMJB:** Die-cast aluminum body; painted finishes are granulated powder coat.  
**Remote Power Supply:** 22 Gauge galvanized steel.

### LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K.  
3-step MacAdam ellipse LED module available in 90+ configuration in color temperature of 2400K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

### TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life: 50,000 hours. Driver assembly is field-replaceable.

### POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE	0-10V						ECO	DALI		ATHENA		CASAMBI	
Power Supply	1PH	1SG	1SN	1EG	1EN	1DG	1DN	1LH	1ED	1DD	UAS1	UAD1	UCS1	UCD1
Minimum °C	-10 °C	-10 °C	-10 °C	-20 °C	-20 °C	-20 °C	-20 °C	0 °C	-20 °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	1.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: 1LH, 1EG and 1EN drivers consult chart on page 7 to confirm appropriate dimming curve for compatibility with selected control.

### MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
PH,SG,SN	285'	180'	113'	71'	45'
LH	60'	40'	25'	15'	-
EG, EN, ED, DG, DN, DD, UAS, UAD, UCS, UCD	-	-	118'	72'	46'

### MOUNTING

Cylinder is supplied with a mounting adaptor, which integrates with standard 3/0 or 4/0 junction boxes. Ceiling-mount junction box available for 1/2" (13mm) and 3/4" (19mm) conduit and features concealed internal clamps for clean fitting-free conduit exit and entry.

### LISTING

cTUVus listed to UL1598 standard for Dry / Damp and Wet locations. IP30 (Dry/Damp) rated at IEC60598 and IP55 (Wet) rated at IEC60529. Title 24 JA8-2022 Listed.

### BUY AMERICAN ACT

CP4X-FB configuration is Buy American Act compliant.

### DECLARE

LBC Red List Approved.

### WEIGHT

Fixture - 6 lbs max  
Remote Driver - 1.4 lbs

### LIMITED WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult [website](#) for full warranty terms and conditions.

### CHANGE LOG

- 01/06/2022: ADDED TITLE 24 JA8-2022 LISTING.
- 04/26/2023: ADDED DECLARE LBC RED LIST APPROVED.
- 08/08/2023: ADDED NEW LED AND OPTIC SYSTEM.
- 1/11/2024: ADDED ATHENA/CASAMBI OFFERINGS, ADDED 2400K OFFERING, ADDED RESIDENTIAL TW OFFERING.
- 07/11/2024: UPDATED AVAILABLE POWDERCOAT FINISHES.
- 07/22/2024: REMOVED L2 DRIVER.

# CYLINDER 4 SUSPENDED CABLE

## DIMMING COMPATIBILITY

### LUTRON DRIVER COMPATIBILITY


Power supply 1LH Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _E (wireless) QSGR- _E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



### eldoLED DRIVER COMPATIBILITY

Power supply EA2 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply LA2 Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1

### ANALOG DRIVERS AND DIMMERS

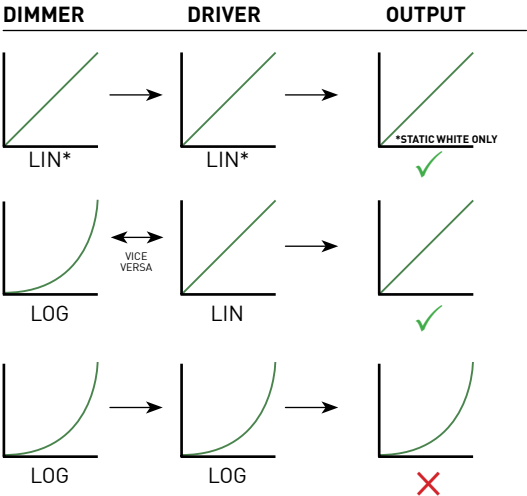

LIN = LINEAR  
LOG = LOGARITHMIC  
\*LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM