

MONOPOINT CM2 HANG STRAIGHT

An innovative solution for sloped ceilings, this monopoint “hang straight” can suspend with a rigid stem up to 4’ in length, for ceiling pitches up to 45° while still allowing for a full 90° tilt.

PROJECT NAME:

TYPE:



ORDERING INFORMATION - MONOPOINT



JA8-2022 COMPLIANCE INDICATED BY SHADING

CYLINDER	LENGTH	FIXTURE	BODY FINISH	BAFFLE FINISH	STEM FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	DRIVER	MEDIA	MOUNTING
CM2		HS1									
CM2 3.25"	LENGTHS SL 3" Standard 24 24" 48 48" 24" AND 48" STEMS ARE FIELD CUTTABLE. 3" STANDARD LENGTH STEM IS MINIMUM LENGTH.	ADJUSTABLE DRY / DAMP HS1 Adjustable 90° Fixture Tilt, Max ceiling pitch 12/12 (45°)	POWDERCOAT	POWDERCOAT	POWDERCOAT	STATIC WHITE	24 2400K* *(90+ CRI only)	10 10° (>19)	INTEGRAL	STANDARD MEDIA	ROUGH-IN
			WH White	WH White	WH White	80S11A 80+ CRI, 11 Watts lm Delivered - 1216	27 2700K	15 15° (<13)	CA 0-10V Analog 120-277V	4 Soft Focus Lens* *(Required for 10° optic)	J JBMP 4" Sq. or 4/0 Junction Box Mounting Plate. Features 3.25" diameter canopy* *(Mounting plate must be installed on junction box prior to ceiling installation)
			BK Black	BK Black	BK Black	80S17A 80+ CRI, 17 Watts lm Delivered - 1843	30 3000K	20 20° (<10)	CE Electronic ELV / TRIAC 120V		
			AB Architectural Bronze	AB Architectural Bronze	AB Architectural Bronze	90S11A 90+ CRI, 11 Watts lm Delivered - 1045	35 3500K	25 25° (<10)	REMOTE (120V)		
			AG Satin Silver	AG Satin Silver	AG Satin Silver	90S17A 90+ CRI, 17 Watts lm Delivered - 1583	40 4000K	40 40° (<10)	RE Electronic ELV / TRIAC *	ALTERNATE MEDIA	
			AU Cashmere Gold	AU Cashmere Gold	AU Cashmere Gold	97S11A 97+ CRI, 11 Watts lm Delivered - 918		60 60° (<16)	*(18W Max)	2 Honeycomb Louver* *(Not available for Wet Location or Warm Dim)	FINISH OUT
			BB Burnt Bronze	BB Burnt Bronze	BB Burnt Bronze	97S17A 97+ CRI, 17 Watts lm Delivered - 1390			REMOTE (120V-277V)	3 Clear Glass Lens* *(Not available for Warm Dim)	G Zero Sightline Gypsum (1/16" Applique) Features 2.6" diameter canopy* *(Mounts to 4/0 junction box)
			CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	REMOTE STATIC WHITE	27 2700K	15 15° (<13)	RA 0-10V Analog *	5 Frosted Glass Lens	W Zero Sightline Millwork Features 2.6" diameter canopy* *(Mounts to 4/0 junction box. Requires accessory part number CMHS-RTG ordered separately.)
			ALUMINA	ALUMINA	ALUMINA	80S28B 80+ CRI, 28 Watts lm Delivered - 2756	30 3000K	20 20° (<10)	LH Lutron, Hi-Lume Ecosystem 1% Fade to Black,	6 Frosted Soft Focus Lens	R Remodel 4.5" diameter Flange Overlay Canopy* *(Mounts to existing 4/0 junction box)
			01 Brushed Obsidian	CONSULT FACTORY FOR ALUMINA FINISHES	CONSULT FACTORY FOR ALUMINA FINISHES	90S28B 90+ CRI, 28 Watts lm Delivered - 2368	35 3500K* *(Not available for 97+ CRI)	25 25° (<10)	LP Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black	7 Frosted Linear Spread Lens	
			02 Matte Obsidian			97S28B 97+ CRI, 28 Watts lm Delivered - 2079	40 4000K	40 40° (<10)	EG eldoLED, SOLdrive 0.1% 0-10V, LOG	S Soft Focus Lens w/ Honeycomb Louver	
			03 Brushed Dark Patinated Bronze			WARM DIM		60 60° (<16)	EN eldoLED, SOLdrive 0.1% 0-10V, LIN	F Frosted Glass Lens w/ Honeycomb Louver	
			04 Matte Dark Patinated Bronze			90W18A 90+ CRI, 18 Watts Incandescent Profile lm Delivered - 1140	WL 2700K - 1800K	20 20° (<10)	ED eldoLED, SOLdrive 0.1% DALI-2, LOG	N No Lens* *(Not available for Wet Location or Warm Dim)	
			05 Brushed Aged Aluminum			Halogen Profile lm Delivered - 1128	WD 3000K - 1800K	25 25° (<10)	AS1 / Athena Control ASR eldoLED, DUALdrive 0.1%* *(Includes Athena Node. Increased lead time, consult factory. ASR includes shunt.)		
			06 Matte Aged Aluminum			SEE PAGE 3 FOR WARM DIM PROFILE COMPARISON.		40 40° (<10)	CS1 / Casambi Control CSR eldoLED, DUALdrive 0.1%* *(Includes Athena Node. Increased lead time, consult factory. CSR includes shunt.)		
			07 Brushed Cast Brass			REMOTE TUNABLE WHITE	TH 5000K - 2700K	60 60° (<13)	TUNABLE WHITE POWER SUPPLIES (120-277V)		
			08 Matte Cast Brass			90T28B 90+ CRI, 28W Cool Profile: 5000K - 2700K lm Delivered - 1977	TR 4000K - 1800K	15 15° (<13)	DD eldoLED, DUALdrive 0.1% DALI-2, LOG		
			09 Brushed Light Patinated Bronze			Warm Profile: 4000K - 1800K lm Delivered - 1995		20 20° (<13)	DG eldoLED, DUALdrive 0.1% 0-10V, LOG		
			10 Matte Light Patinated Bronze					25 25° (<13)	DN eldoLED, DUALdrive 0.1% 0-10V, LIN		
								40 40° (<13)	AD1 / Athena Control ADR eldoLED, DUALdrive 0.1%* *(Includes Athena Node. Increased lead time, consult factory. ADR includes shunt.)		
							60 60° (<16)	CD1 / Casambi Control CDR eldoLED, DUALdrive 0.1%* *(Includes Casambi Node. Extended lead time, consult factory. CDR includes shunt)			
						ALL LM DELIVERED AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 20° OPTIC AND SOFT FOCUS LENS		SEE PAGE 3 FOR UGR RATINGS			

Red List Approved

Declare

Part Number Notes

PART NUMBER NOTES

- CM2 ships as e.g., CM224HS1WHBKWH90S11*3040CA*4
- Remote driver ships as e.g., PS-RMT-90S-28B-1RE*
- Mounting ships separate from fixture, part numbers listed on page 5.



LUCIFER
LIGHTING COMPANY

luciferlighting.com

©2024 Lucifer Lighting Company

As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

[PH] +1-210-227-7329
[FAX] +1-210-227-4967

pg. 1

[DATE OF REV: 09192024]

MONOPOINT CM2 HANG STRAIGHT

FINISHES

POWDERCOAT FINISHES

					
(WH) White	(BK) Black	(AB) Architectural Bronze	(AG) Satin Silver	(AU) Cashmere Gold	(BB) Burnt Bronze

ALUMINA FINISHES BY LUCIFER LIGHTING™

				
(01) Brushed Obsidian	(03) Brushed Dark Patinated Bronze	(05) Brushed Aged Aluminum	(07) Brushed Cast Brass	(09) Brushed Light Patinated Bronze
				
(02) Matte Obsidian	(04) Matte Dark Patinated Bronze	(06) Matte Aged Aluminum	(08) Matte Cast Brass	(10) Matte Light Patinated Bronze

ACCESSORIES

REPLACEMENT MEDIA

☐ **HCL-CT2** Honeycomb Louver*
*(Not available for Warm Dim)

☐ **CGL-CT2** Clear Glass Lens*
*(Not available for Warm Dim)

☐ **SFL-CT2** Soft Focus Lens

☐ **FGL-CT2** Frosted Glass Lens

☐ **FSFL-CT2** Frosted Soft Focus Lens

☐ **FLSL-CT2** Frosted Linear Spread Lens

SECOND MEDIA GASKET

Replaces standard gasket when installing second media. Not required if two media are specified with fixture.

☐ **2EDG-CT2** Two Media Gasket

REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

Static White		Warm Dim		Tunable White	
<input type="checkbox"/> RO-70-15-S	15° optic	<input type="checkbox"/> RO-70-20-W	20° optic	<input type="checkbox"/> RO-70-15-S	15° optic
<input type="checkbox"/> RO-70-20-S	20° optic	<input type="checkbox"/> RO-70-25-W	25° optic	<input type="checkbox"/> RO-70-20-S	20° optic
<input type="checkbox"/> RO-70-25-S	25° optic	<input type="checkbox"/> RO-70-40-W	40° optic	<input type="checkbox"/> RO-70-25-S	25° optic
<input type="checkbox"/> RO-70-40-S	40° optic	<input type="checkbox"/> RO-70-60-W	60° optic	<input type="checkbox"/> RO-70-40-S	40° optic
<input type="checkbox"/> RO-70-60-S	60° optic			<input type="checkbox"/> RO-70-60-S	60° optic

EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- | | |
|--|--|
| <input type="checkbox"/> EMB-S-25-120/277-LEDX | 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable |
| <input type="checkbox"/> EMB-S-100-120-LEDX | 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable |
| <input type="checkbox"/> EMB-S-100-277-LEDX | 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable |
| <input type="checkbox"/> EMB-S-250-120/277-LEDX | 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable |

***SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.**

ZERO-SIGHTLINE MILLWORK ROUTER TOOL GUIDE

Required for zero-sightline millwork installations. Factory recommends qty. 2 per order.

☐ **CMHS-RTG** Router Tool Guide

MONOPOINT CM2 HANG STRAIGHT

PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC FIELD REDUCER		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	613	55	1143	104	1216	111	1202	109	1124	102	949	86
80S17A	17	828	49	1750	103	1843	108	1823	107	1690	99	1440	85
80S28B	28	-	-	2571	92	2756	98	2694	96	2529	90	2072	74
90S11A	11	528	48	982	89	1045	95	1033	94	966	88	815	74
90S17A	17	714	42	1503	88	1583	91	1566	92	1452	85	1237	73
90S28B	28	-	-	2209	79	2368	85	2314	83	2193	78	1780	64
97S11A	11	456	41	862	78	918	83	907	82	848	77	716	65
97S17A	17	616	36	1320	78	1390	82	1375	81	1275	75	1086	64
97S28B	28	-	-	1939	69	2079	74	2032	73	1908	68	1563	56
90W18A (2700K-1800K)	18	-	-	-	-	1140	63	1128	63	1044	58	915	51
90W18A (3000K-1800K)	18	-	-	-	-	1128	63	1126	63	1063	59	926	51
90T28B (4000K-1800K)	28	-	-	1972	70	1995	71	1971	70	1837	66	1655	59
90T28B (5000K-2700K)	28	-	-	1954	70	1977	71	1953	70	1820	65	1640	59

TITLE 24 JA8-2022 INDICATED BY SHADING

UNIFIED GLARE RATING

10° OPTIC FIELD REDUCER	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
>19	<13	<13	<13	<13	<16

MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
No Lens	1.05
CGL	1.00
SFL	1.00
FGL	0.85
FSFL	0.82
FLSL	0.78
HCL	0.75
SFL W/ HCL	0.68
FGL W/ HCL	0.47

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.000
3500K	1.03
4000K	1.08

TUNABLE WHITE MULTIPLIER

CCT	5000K-2700K	4000K-1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69



WARM DIM PERFORMANCE - SOFT FOCUS LENS - 20° OPTIC

INCANDESCENT DIMMING PROFILE

90W18AL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2650	2620	2520	2180	1950	1800
Light Output (lm)	1128	902	790	564	226	113	23
Power (W)	18	14.4	12.6	9	3.6	1.8	0.36
Efficacy (LPW)	63	63	63	63	63	63	63

HALOGEN WARM DIM PROFILE

90W18AD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (lm)	1140	912	798	570	228	114	23
Power (W)	18	14.4	12.6	9	3.6	1.8	0.36
Efficacy (LPW)	62	62	62	62	62	62	62

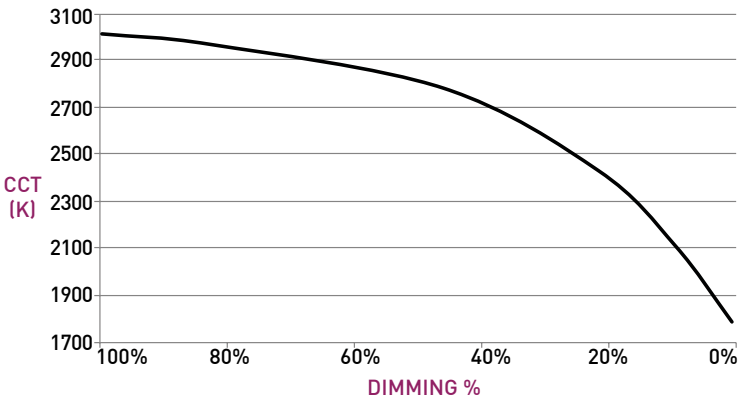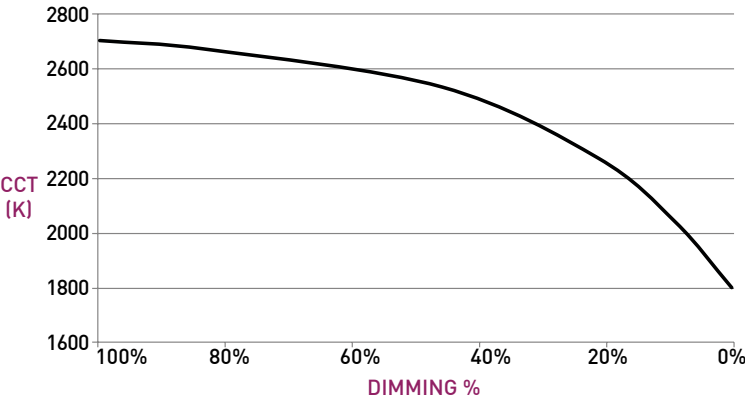


MONOPOINT CM2 HANG STRAIGHT

MONOPOINT

- A STEM**
Standard length is 3", also available in 24" and 48" lengths. All lengths excepts 3" are field cuttable. Powdercoat finishes standard, consult factory for Alumina finishes.
- B BODY**
Available in powdercoat and Alumina finishes. Power supply integrated into fixture body.
- C OPTICS**
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
- D 10° FIELD REDUCER**
Soft Focus Lens, Honeycomb Louver, and Field Reducer provided with 10° optic. Reduces field angle by 30%.
- E MEDIA**
Soft Focus Lens standard. Wet location media sealed in place.
- F BAFFLE**
Accepts 2 media devices. Baffle minimizes aperture glare and conceals view into fixture. Powdercoat finishes standard, consult factory for Alumina finishes.
- G HANG STRAIGHT CANOPY**
Features hidden ball joint that accomodates installations on up to 12/12 (45°) sloped ceilings.
- H ADJUSTABILITY**
Features locking 90° tilt and 365° rotation. Stem features 45° tilt to accommodate up to 12/12 slopes.

DIMENSIONS / DRAWINGS

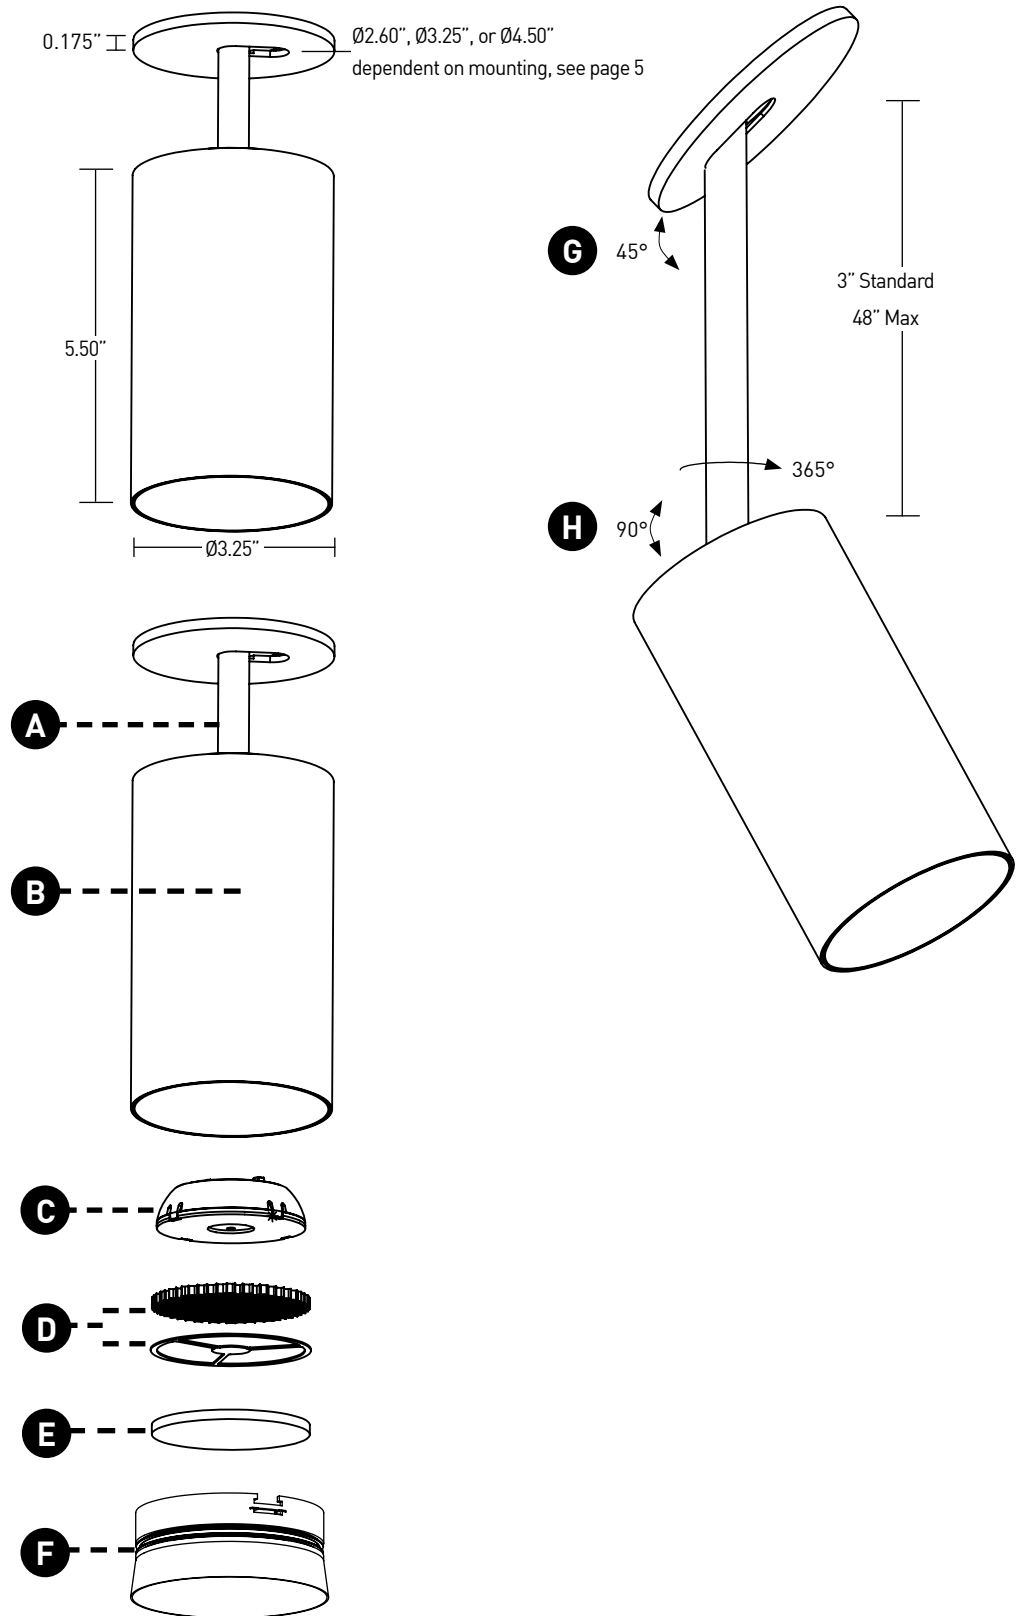

MONOPOINT CM2 HANG STRAIGHT

MOUNTING

IMPORTANT: Fixture cannot be installed with pancake junction boxes.

I JBMP

Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box . To be installed during rough-in, prior to substrate, for ceiling thicknesses up to 0.75". Fixture to mount flush with minimalist transition to ceiling.

Part Number - CMHS-JBMP

J ZERO-SIGHTLINE DRYWALL

Provided with mud-in appliqué that mounts to standard 4" 4/0 junction box. Allows fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic. Standard plaster stop thickness of 1/16". Not recommended for stucco applications.

Part Number - DLA-APP-CMHS

K REMODEL / FLANGE OVERLAY

Provided with oversized canopy and mounting plate for standard 4" square or 4" 4/0 junction boxes . Ideal for existing applications and features oversized 4.5" canopy to cover standard 4" octagon box cutout.

Part Number - CMHS-SMK

L ZERO-SIGHTLINE MILLWORK

Mounting plate (concealed) for standard 4" square or 4" 4/0 junction boxes. To be installed during rough-in prior to substrate. Router guide, specified separately, required to make surface bore allowing fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic.


Part Number - CMHS-JBMP

Router Guide Part Number - CMHS-RTG


DIMENSIONS / DRAWINGS

I

JBMP





INSTALL JBMP BEFORE CEILING

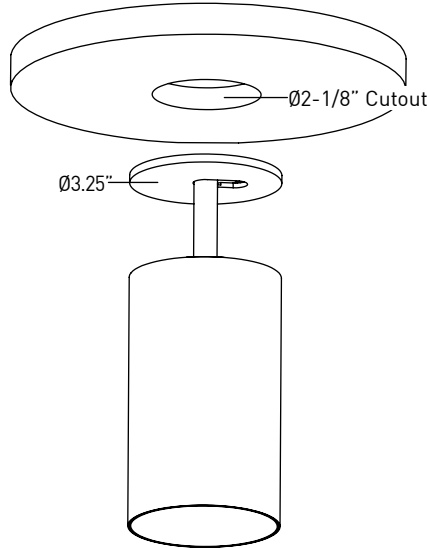



J

ZERO-SIGHTLINE DRYWALL

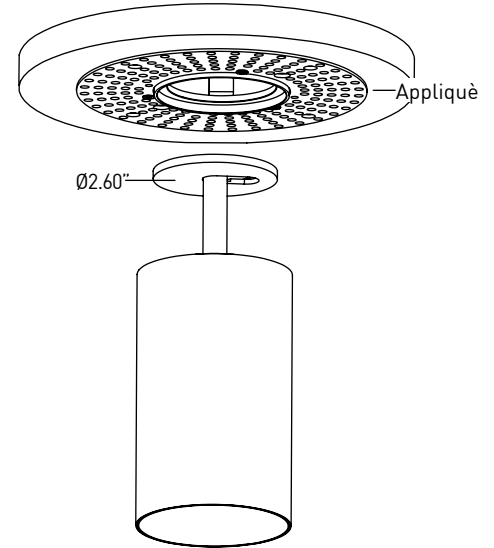


K

REMODEL / FLANGE OVERLAY

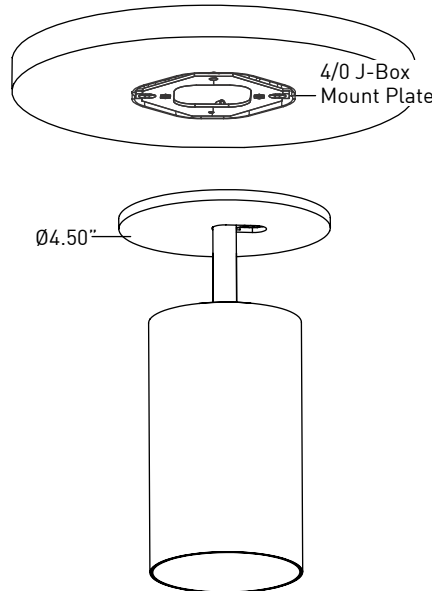



L

ZERO-SIGHTLINE MILLWORK

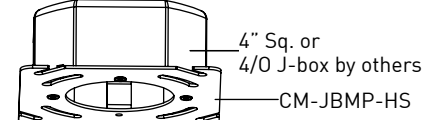

INSTALL JBMP BEFORE CEILING

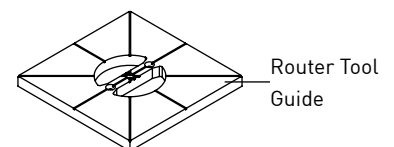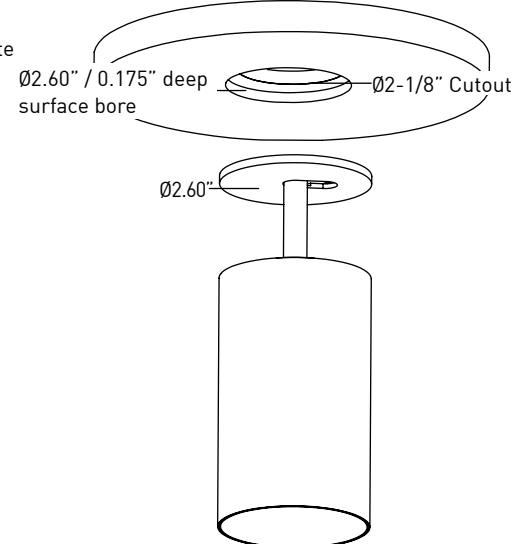

MONOPOINT CM2 HANG STRAIGHT

REMOTE POWER SUPPLY

- M** Remote power supply provides additional driver options. See page 7 for maximum allowable wiring distance. Must be installed in an accessible location.

- N** **ATHENA / CASAMBI CONTROL**
Controls integrated into remote driver assembly. All equipment is serviceable.

Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI


Casambi Model Number: BT-S1E1-5400

- O** **ATHENA / CASAMBI EM SHUNT**
Included with drivers specified as ASR, ATR, CSR, or CTR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT



DIMENSIONS / DRAWINGS

M

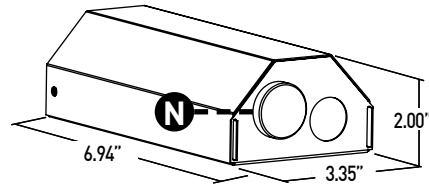

O

ATHENA / CASAMBI EM SHUNT

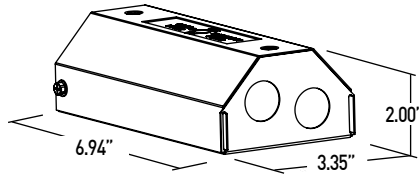

MONOPOINT CM2 HANG STRAIGHT

TECHNICAL

CONSTRUCTION

Monopoint: Machined aluminum body; painted finishes are granulated powder coat; Alumina finishes are anodized aluminum.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Machined Aluminum

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperature of 2400K. Average rated lamp life of 50,000 hours.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours.

TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE			ECO								0-10V		DALI-2		ATHENA		CASAMBI	
Power Supply	CE/RE	LH	LP	CA/RA	SG	SN	EG	EN	DG	DN	ED	DD	AS	AT	CS	CT			
Minimum °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	0.1%	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For LH, LP, SG, SN, EG, EN, DG, and DN drivers consult chart on page 8 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
RA, RE	-	164'	105'	66'	40'
SG, SN	285'	180'	113'	71'	45'
LH, LP	60'	40'	25'	15'	-
EG, EN, ED, DG, DN, DD, AS, AT, CS, CT	-	-	118'	72'	46'

LISTING

cTUVus listed to UL1598 standard for Dry / Damp locations. Title 24 JA8-2022 Listed. NEMA 410 Compliant.

DECLARE

LBC Red List Approved.

BUY AMERICA ACT

All CM2 Hang Straight fixtures are BAA compliant.

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. [Consult website for full warranty terms and conditions.](#)

CHANGE LOG

- 02/13/2024: ADDED TUNABLE WHITE OFFERING.
- 03/18/2024: UPDATED 10 DEGREE NARROW BEAM TO UTILIZE FILED REDUCER.
- 07/15/2024: REMOVED L2 DRIVER OFFERING.
- 09/19/2024: UPDATED WITH NEW BAFFLE DESIGN.



MONOPOINT CM2 HANG STRAIGHT

DIMMING COMPATABILITY

PHILIPS DRIVER COMPATIBILITY

Power supply SG Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IllumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV

LUTRON DRIVER COMPATIBILITY

Power supply LH / LP Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _ E (wireless) QSGR- _ E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	



eldoLED DRIVER COMPATIBILITY

Power supply EG, DG Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply EN, DN Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nI0 EZ
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

