

# TIMBER GLOW™

Introducing Timber Glow™-- Lucifer Lighting's new premier wooden baffle offering for Fraxion® downlights. Offered in White Oak and Walnut factory supplied wood. For all other hard wood selections, we will accept wood directly from clients for in-house fabrication.


Baffles must be finished with a moisture resistant sealer within two weeks of receipt at jobsite.



## COMPATIBLE WOODS

To ensure proper machining and performance, please refer to the checklist below for wood compatibility requirements.

1. Ensure the wood is hard wood, this wood must be >900 on the Janka scale.
2. Wood must have a straight open or closed grain structure.
3. No endangered woods can be used.
4. Moisture content must be less than 8%.

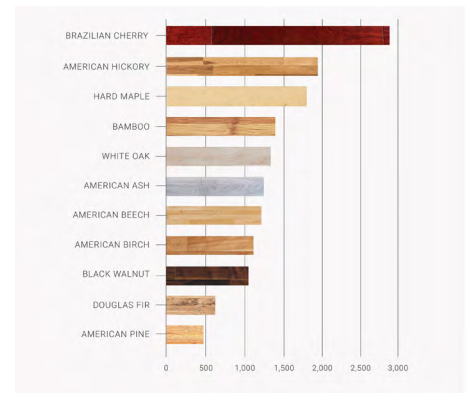

Janka Scale

The wood supplied by the customer needs to be 8/4 (2") minimum thick, 4.75" (wide), and 4.75" X # of baffles long. It is important to provide 10% extra material for fallout.

## OFFERING

Timber Glow™ wooden baffles will be available for Fraxion®3 and Fraxion®4 fixtures for dry and damp locations only. Options include round or square baffle, deep or shallow regress, and fixed or adjustable configurations.



WALNUT



WHITE OAK

## FINISHING DETAILS

- Our baffles do NOT come pre-finished.
- We recomend the finish to match the corresponding wood ceiling.
- We recommend a durable moisture-resistant clean coat lacquer.
- Polyurethane products are acceptable.
- Wood finishing oils, such as Danish or teak oil, can be used, noting that the color of the wood may be affected.

## LEAD TIME

	0-20 UNITS	21-50 UNITS	51+ UNITS
CLIENT SUPPLIED WOOD (FROM FACTORY RECEIPT OF WOOD)	4 WEEKS	5 WEEKS	CONSULT FACTORY
LLC OFFERED WOOD (POST ORDER RELEASE)	4 WEEKS	5 WEEKS	CONSULT FACTORY