

VERSAILLES

ADJUSTABLE PICTURE LIGHT

VERSAILLES

DESCRIPTION

A General

Adjustable low voltage picture light for illuminating artwork; utilizes Series 2000/3000 light strip; fabricated in lengths up to 72" (1829mm)

B Special Features

Lockable, free rotation through 90°; fixture length (X), arm setback (Y) and rise (Z) may be custom sized per specification; 2" (50mm) minimum clearance above fixture centerline required to accommodate arm bends

C Mounting


Basic configuration (FM) mounts to picture frame or wall with reversible brackets

Alternate configuration (JBP) allows mounting to standard 2"x4" junction box (owner provided) with optional mounting plates

Mounting brackets/plates and suspension arm placement determined by end cap location

D WIRING

Suspension arms include low voltage secondary wiring at two locations which must be routed to transformer (transformer specified separately); transformer may be recessed and concealed behind artwork (optional)

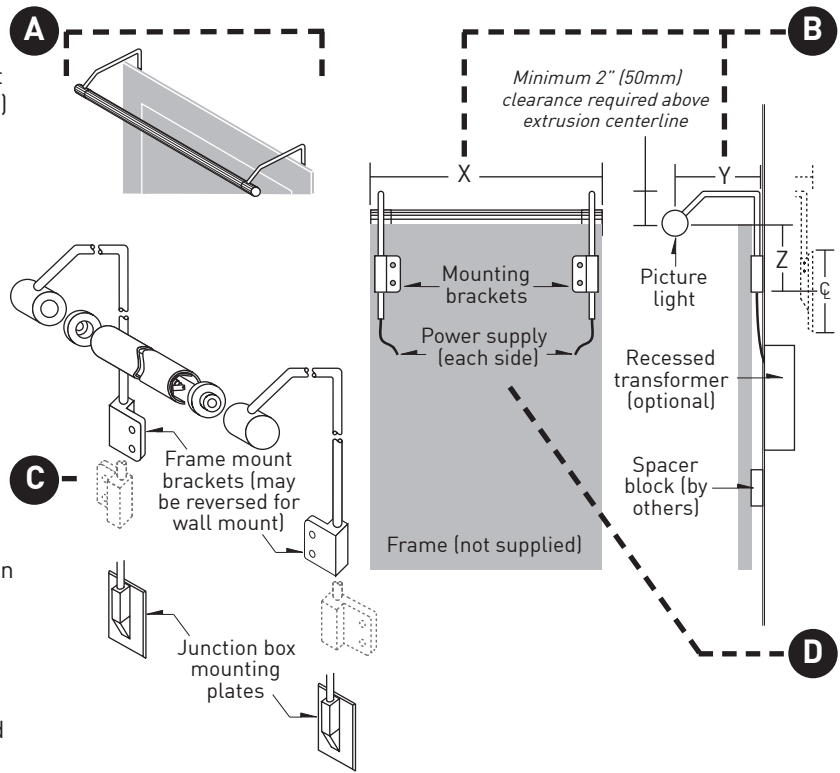

TECHNICAL

CONSTRUCTION

Lamp Holder Assembly: Body is extruded aluminum; arms, end caps and bearing caps are machined brass; suspension arm mounting brackets or plates are machined aluminum; painted finishes are granulated powdercoat

Light Strip: Polyethersulfone thermoplastic with solid brass conductors

ELECTRICAL

24V, 3W, 5W or 10W xenon frosted festoon lamps which have a color temperature of 2800 °K. 20,000 hour rated lamp life.

Maximum fixture current draw is 15 amps at 24 volts. Load varies based on lamp selection and fixture length.

LISTING

ETL listed for dry/damp locations; CE marked

WARRANTY

Manufacturer's one year warranty guarantees product(s) listed to be free from defects in material workmanship under normal use and service. Warranty is conditional upon use of manufacturer supplied transformer or ballast.

ORDERING INFORMATION

Example: VER-036-08-10-BN-24-05-XF-FM

SERIES	LENGTH	ARM SETBACK	ARM RISE	FINISH	FESTOON LAMP OPTIONS	MOUNTING
VER Versailles	<i>In inches</i> Overall length; max 72" (1829mm)	<i>In inches</i> Wall or mounting surface to fixture body centerline; min 3.5" (90mm)	<i>In inches</i> Bottom of frame mount bracket or junction box plate centerline to fixture body centerline; min 1.4" (35mm)	W Matte White Powdercoat B Matte Black Powdercoat BG Brushed Brass BC Brushed Chrome BN Lacquered Black Nickel	24-03-XF 24V 3W Xenon Frosted 24-05-XF 24V 5W Xenon Frosted 24-10-XF 24V 10W Xenon Frosted <i>Consult factory for availability of LED options</i>	FM Frame Mount (reversible for wall mount) JBP 2"x4" Junction Box Plate

LUCIFER
LIGHTING COMPANY

luciferlighting.com

©2010 Lucifer Lighting Company
As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

3750 IH35 North
San Antonio, Texas 78219
[PH] +1-210-227-7329
[FAX] +1-210-227-4967

[092410]